					ST DEPARTMENT DIVISION C	T OF NA					AMENI	FC DED REPOR	RM 3	
		AF	PLICATION	FOR PER	MIT TO DRILL					1. WELL NAME and NUMBER GMBU L-9-9-16				
2. TYPE O	F WORK	DRILL NEW WELL	REENTI	ER P&A WE	:LL DEEPEN	I WELL [	)			3. FIELD OR WILDCAT  MONUMENT BUTTE				
4. TYPE O	F WELL				ethane Well: NO				$\neg$	5. UNIT or COMMUNIT	FIZATION GMBU (		ENT NAM	IE .
6. NAME (	6. NAME OF OPERATOR  NEWFIELD PRODUCTION COMPANY										435 64			
8. ADDRESS OF OPERATOR Rt 3 Box 3630 , Myton, UT, 84052										9. OPERATOR E-MAIL		ewfield.co	m	
10. MINERAL LEASE NUMBER (FEDERAL, INDIAN, OR STATE)  11. MINERAL OWNERSHIP (FEDERAL, INDIAN, OR STATE)										12. SURFACE OWNERSHIP  FEDERAL ( In ) INDIAN  STATE  FEE  FEE				
13. NAME	OF SURFACE	UTU-65207 OWNER (if box 12 :	= 'fee')						-	14. SURFACE OWNER				
15. ADDR	ESS OF SURFA	CE OWNER (if box	12 = 'fee')						$\dashv$	16. SURFACE OWNER	R E-MAIL	(if box 12	! = 'fee')	
17. INDIAI	N ALLOTTEE O	R TRIBE NAME			INTEND TO COMM		PRODUCTIO	N FROM	$\neg$	19. SLANT				
(if box 12 = 'INDIAN')  MULTIPLE FORMATIONS  YES (Submit Commingling Application) NO									VERTICAL DIF	RECTION	AL 📵 H	HORIZON	AL 🔵	
20. LOC	ATION OF WELL FOOTAGES QTR-QTR SECTION				N	TOWNSHIP	RA	ANGE	МЕ	RIDIAN				
LOCATIO	ION AT SURFACE 1817 FNL 669 FEL				SENE	9		9.0 S	16	6.0 E		S		
Top of Uppermost Producing Zone 2325 FNL 110			107 FEL		SENE	9		9.0 S	16	6.0 E		S		
At Total Depth 2848 FNL 1583 FEL					583 FEL	1	WSE	9		9.0 S 16.0 E				S
21. COUNTY  DUCHESNE  22. DISTANCE TO NEAREST LEASE LINE (Feet) 669									23. NUMBER OF ACRE	ES IN DRI 2		IT		
25. DISTANCE TO NEAREST WE (Applied For Drilling or Compl								POOL		26. PROPOSED DEPTI		TVD: 626	55	
27. ELEV	ATION - GROUN	<b>1D LEVEL</b> 5722		28. 1	BOND NUMBER	WYB0	000493			29. SOURCE OF DRILLING WATER / WATER RIGHTS APPROVAL NUMBER IF APPLICABLE 437478				
					Hole, Casing	, and C	ement Info	ormation						
String	Hole Size	Casing Size	Length	Weight			Max Mu			Cement		Sacks	Yield	Weight
Surf	12.25 7.875	8.625 5.5	0 - 300	24.0 15.5	J-55 ST8		8.3		Dran	Class G		138	1.17	15.8
Prod	7.875	5.5	0 - 6439	15.5	J-55 LT8	&C	0	•	Pren	nium Lite High Strer 50/50 Poz	igin	307	3.26 1.24	14.3
				<u> </u>	A	TTACH	IMENTS			00,00 1 02		000		
	VERIFY THE FOLLOWING ARE ATTACHED IN ACCORDANCE WITH THE UTAH OIL AND GAS CONSERVATION GENERAL RULES													
<b>w</b> w	ELL PLAT OR M	AP PREPARED BY I	LICENSED SUR	VEYOR OR	ENGINEER		<b>⊯</b> con	IPLETE DRILLI	NG PI	_AN				
AF	FIDAVIT OF STA	ATUS OF SURFACE	OWNER AGRE	EMENT (IF	FEE SURFACE)		FOR	M 5. IF OPERA	TOR IS	S OTHER THAN THE LE	EASE OW	NER		
<b>I</b> ✓ DII	RECTIONAL SU	RVEY PLAN (IF DIR	ECTIONALLY (	OR HORIZO	ONTALLY DRILLED	))	торо	OGRAPHICAL I	MAP					
NAME Ti	m Eaton				TITLE Regulator	ry Tech			PI	HONE 465 646-4858				
SIGNATU	RE				<b>DATE</b> 01/11/20	)12			EI	MAIL teaton@newfield.	com			
	BER ASSIGNED )1351173(				APPROVAL				F	×00.64111				
									Pe	Permit Manager				

#### NEWFIELD PRODUCTION COMPANY GMBU L-9-9-16 AT SURFACE: SE/NE SECTION 9, T9S, R16E DUCHESNE COUNTY, UTAH

#### TEN POINT DRILLING PROGRAM

#### 1. **GEOLOGIC SURFACE FORMATION:**

Uinta formation of Upper Eocene Age

#### 2. <u>ESTIMATED TOPS OF IMPORTANT GEOLOGIC MARKERS:</u>

 Uinta
 0' – 1565'

 Green River
 1565'

 Wasatch
 6115'

 Proposed TD
 6439'

#### 3. <u>ESTIMATED DEPTHS OF ANTICIPATED WATER, OIL, GAS OR MINERALS:</u>

Green River Formation (Oil) 1565' – 6115'

Fresh water may be encountered in the Uinta Formation, but would not be expected below about 350'. All water shows and water bearing geologic units shall be reported to the geologic and engineering staff of the Vernal Office prior to running the next string of casing or before plugging orders are requested. All water shows must be reported within one (1) business day after being encountered.

All usable (<10,000 PPM TDS) water and prospectively valuable minerals (as described by BLM at onsite) encountered during drilling will be recorded by depth and adequately protected. This information shall be reported to the Vernal Office.

Detected water flows shall be sampled, analyzed, and reported to the geologic & engineering staff of the Vernal Office. The office may request additional water samples for further analysis. Usage of the State of Utah form *Report of Water Encountered* is acceptable, but not required.

The following information is requested for water shows and samples where applicable:

Location & Sampled Interval Date Sampled Flow Rate Temperature

Hardness pH

Water Classification (State of Utah)

Dissolved Calcium (Ca) (mg/l)

Dissolved Iron (Fe) (ug/l)

Dissolved Sodium (Na) (mg/l)

Dissolved Carbonate (CO<sub>3</sub>) (mg/l)

Dissolved Bicarbonate (NaHCO<sub>3</sub>) (mg/l)

Dissolved Sulfate (SO<sub>4</sub>) (mg/l)

Dissolved Total Solids (TDS) (mg/l)

RECEIVED: January 11, 2012

Ten Point Well Program & Thirteen Point Well Program Page 2 of 4

#### 4. PROPOSED CASING PROGRAM

a. Casing Design: GMBU L-9-9-16

Size	Interval		\\/aiabt	Grade	Coupling	Design Factors			
Size	Тор	Bottom	Weight	Grade	Coupling	Burst	Collapse	Tension	
Surface casing	0'	300'	24.0	J-55	STC	2,950	1,370	244,000	
8-5/8"	U	300	24.0	J-55	310	17.53	14.35	33.89	
Prod casing	0'	6.420	45.5	J-55	LTC	4,810	4,040	217,000	
5-1/2"	U	6,439'	15.5			2.35	1.97	2.17	

#### Assumptions:

- 1) Surface casing max anticipated surface press (MASP) = Frac gradient gas gradient
- 2) Prod casing MASP (production mode) = Pore pressure gas gradient
- 3) All collapse calculations assume fully evacuated casing w/ gas gradient
- 4) All tension calculations assume air weight

Frac gradient at surface casing shoe = 13.0 ppg
Pore pressure at surface casing shoe = 8.33 ppg
Pore pressure at prod casing shoe = 8.33 ppg
Gas gradient = 0.115 psi/ft

All casing shall be new or, if used, inspected and tested. Used casing shall meet or exceed API standards for new casing.

All casing strings shall have a minimum of 1 (one) centralizer on each of the bottom three (3) joints.

b. Cementing Design: GMBU L-9-9-16

Job	Fill	Description	Sacks ft <sup>3</sup>	OH Excess*	Weight (ppg)	Yield (ft³/sk)	
			138		(FF9)	1.17	
Surface casing	300'	Class G w/ 2% CaCl	161	30%	15.8		
Prod casing	4 4001	Prem Lite II w/ 10% gel + 3%	307	000/	44.0	0.00	
Lead	4,439'	KCI	1000	30%	11.0	3.26	
Prod casing	2,000'	50/50 Poz w/ 2% gel + 3%	363	30%	14.3	1.24	
Tail	2,000	KCI	451	30%	14.3	1.24	

<sup>\*</sup>Actual volume pumped will be 15% over the caliper log

- Compressive strength of lead cement: 1800 psi @ 24 hours, 2250 psi @ 72 hours
- Compressive strength of tail cement: 2500 psi @ 24 hours

Hole Sizes: A 12-1/4" hole will be drilled for the 8-5/8" surface casing. A 7-7/8" hole will be drilled for the 5-1/2" production casing.

The 8-5/8" surface casing shall in all cases be cemented back to surface. In the event that during the primary surface cementing operation the cement does not circulate to surface, or if the cement level should fall back more than 8 feet from surface, then a remedial surface cementing operation shall be performed to insure adequate isolation and stabilization of the surface casing.

#### 5. <u>MINIMUM SPECIFICATIONS FOR PRESSURE CONTROL</u>:

Ten Point Well Program & Thirteen Point Well Program Page 3 of 4

The operator's minimum specifications for pressure control equipment are as follows:

An 8" Double Ram Hydraulic unit with a closing unit will be utilized. Function test of BOP's will be check daily.

Refer to **Exhibit C** for a diagram of BOP equipment that will be used on this well.

#### 6. TYPE AND CHARACTERISTICS OF THE PROPOSED CIRCULATION MUDS:

From surface to  $\pm 300$  feet will be drilled with an air/mist system. The air rig is equipped with a 6 ½" blooie line that is straight run and securely anchored. The blooie line is used with a discharge less than 100 ft from the wellbore in order to minimize the well pad size. The blooie line is not equipped with an automatic igniter or continuous pilot light and the compressor is located less than 100 ft from the well bore due to the low possibility of combustion with the air dust mixture. The trailer mounted compressor (capacity of 2000 CFM) has a safety shut-off valve which is located 15 feet from the air rig. A truck with 70 bbls of water is on stand by to be used as kill fluid, if necessary. From about  $\pm 300$  feet to TD, a fresh water system will be utilized. Clay inhibition and hole stability will be achieved with a KCl substitute additive. This additive will be identified in the APD and reviewed to determine if the reserve pit shall be lined. This fresh water system will typically contain Total Dissolved Solids (TDS) of less than 3000 PPM. Anticipated mud weight is 8.4 lbs/gal. If necessary to control formation fluids or pressure, the system will be weighted with the addition of bentonite gel, and if pressure conditions warrant, with barite

No chromate additives will be used in the mud system on Federal and/or Indian lands without prior BLM approval to ensure adequate protection of fresh aquifers.

No chemicals subject to reporting under SARA Title III in an amount equal to or greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling, testing, or completing of this well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported, or disposed of in association with the drilling, testing, or completing of this well.

Hazardous substances specifically listed by the EPA as a hazardous waste or demonstrating a characteristic of a hazardous waste will not be used in drilling, testing, or completion operations.

Newfield Production will **visually** monitor pit levels and flow from the well during drilling operations.

#### 7. AUXILIARY SAFETY EQUIPMENT TO BE USED:

Auxiliary safety equipment will be a Kelly Cock, bit float, and a TIW valve with drill pipe threads.

#### 8. TESTING, LOGGING AND CORING PROGRAMS:

The logging program will consist of a Dual Induction, Gamma Ray and Caliper log from TD to base of surface casing @ 300' +/-, and a Compensated Neutron-Formation Density Log from TD to 3500' +-. A cement bond log will be run from PBTD to cement top. No drill stem testing or coring is planned for this well.

#### 9. ANTICIPATED ABNORMAL PRESSURE OR TEMPERATURE:

No abnormal temperatures or pressures are anticipated. No hydrogen sulfide has been encountered or is known to exist from previous drilling in the area at this depth. Maximum anticipated


Ten Point Well Program & Thirteen Point Well Program Page 4 of 4

bottomhole pressure will approximately equal total depth in feet multiplied by a  $0.433~\mathrm{psi/foot}$  gradient.


#### 10. <u>ANTICIPATED STARTING DATE AND DURATION OF THE OPERATIONS:</u>

It is anticipated that the drilling operations will commence the second quarter of 2012, and take approximately seven (7) days from spud to rig release.

RECEIVED: January 11, 2012

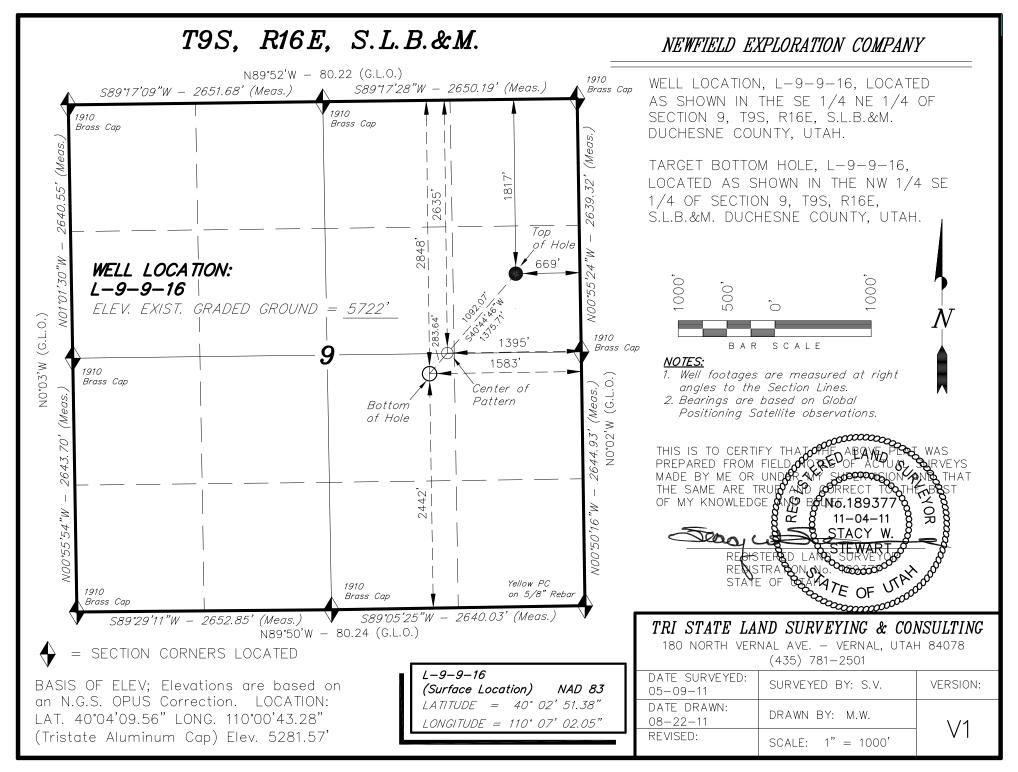

API Well Number: 43013511730000 **Access Road Map** MYTON (\$ 1.7 m;) Bench DUCHESNE UNIVIAH C VALLEY South PLEASANT RESERVATION INDIAN 1581 UNTAH 0 1 M-234 PARIE See Topo "B" 8-9-9-16 (Existing Well) Bench Legend O-10-9-16 (Proposed Well) L-9-9-16 (Proposed Well) Pariette Existing Road **NEWFIELD EXPLORATION COMPANY** P: (435) 781-2501 F: (435) 781-2518

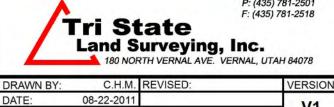

1:100,000


SCALE

V1

8-9-9-16 (Existing Well) O-10-9-16 (Proposed Well) L-9-9-16 (Proposed Well) SEC. 9, T9S, R16E, S.L.B.&M. Duchesne County, UT.

TOPOGRAPHIC MAP



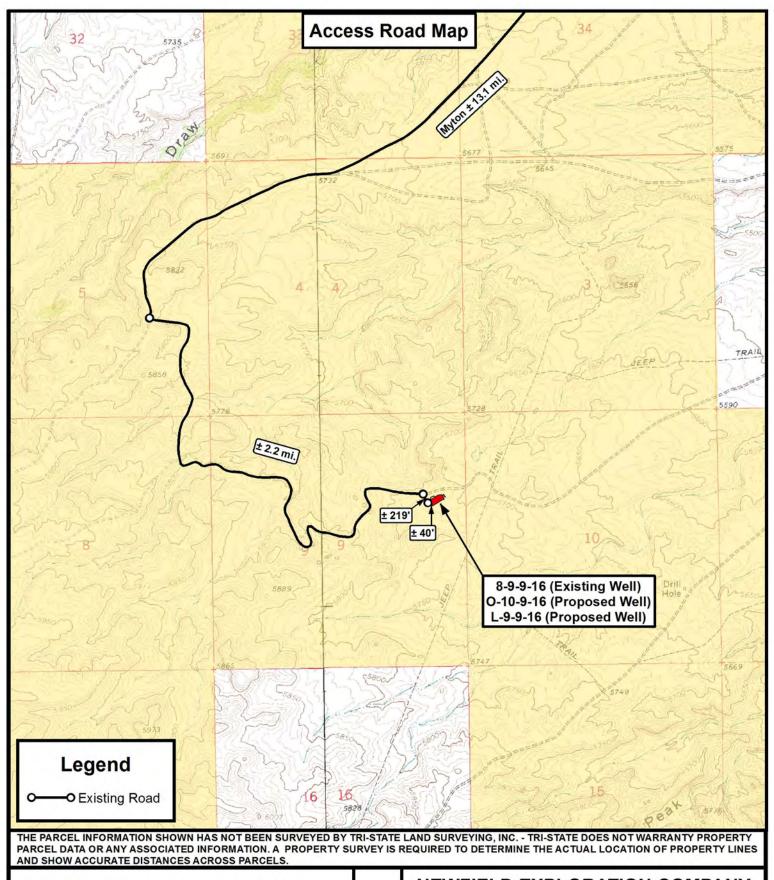



P: (435) 781-2501 F: (435) 781-2518

180 NORTH VERNAL AVE. VERNAL, UTAH 84078


DRAWN BY:	C.H.M.	REVISED:	VERSION:		
DATE:	08-22-2011		V1		
SCALE:	1 " = 2,000 '		V1		

## NEWFIELD EXPLORATION COMPANY

8-9-9-16 (Existing Well) O-10-9-16 (Proposed Well) L-9-9-16 (Proposed Well) SEC. 9, T9S, R16E, S.L.B.&M. Duchesne County, UT.

TOPOGRAPHIC MAP



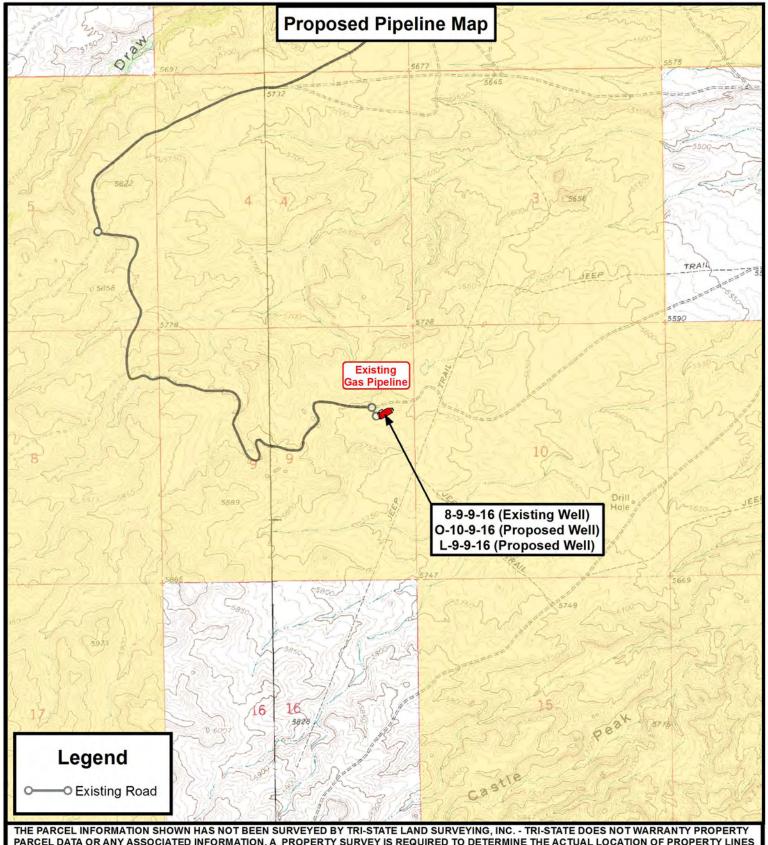

PARCEL DATA OR ANY ASSOCIATED INFORMATION. A PROPERTY SURVEY IS REQUIRED TO DETERMINE THE ACTUAL LOCATION OF PROPERTY LINES AND SHOW ACCURATE DISTANCES ACROSS PARCELS.



P: (435) 781-2501 F: (435) 781-2518

180 NORTH VERNAL AVE. VERNAL, UTAH 84078

DRAWN BY:	C.H.M.	REVISED:	VERSION:
DATE:	08-22-2011		V1
SCALE:	1 " = 2,000 '		VI

### NEWFIELD EXPLORATION COMPANY

8-9-9-16 (Existing Well) O-10-9-16 (Proposed Well) L-9-9-16 (Proposed Well) SEC. 9, T9S, R16E, S.L.B.&M. Duchesne County, UT.


TOPOGRAPHIC MAP

SHEET



SCALE

1 " = 2,000

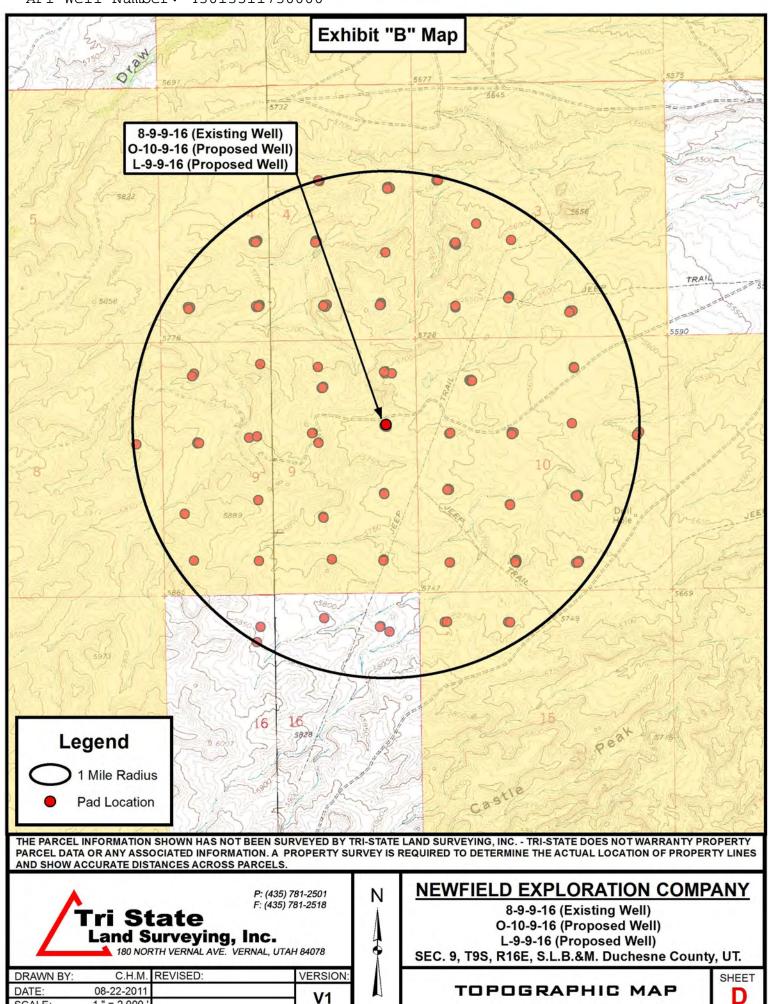



## **NEWFIELD EXPLORATION**

USGS Myton SW (UT) SECTION 9 T9S, R16E L-9-9-16

Wellbore #1

Plan: Design #1

# **Standard Planning Report**

25 June, 2011





#### PayZone Directional Services, LLC.

Planning Report



 Database:
 EDM 2003.21 Single User Db

 Company:
 NEWFIELD EXPLORATION

 Project:
 USGS Myton SW (UT)

 Site:
 SECTION 9 T9S, R16E

 Well:
 L-9-9-16

 Wellbore:
 Wellbore #1

 Design:
 Design #1

Local Co-ordinate Reference:

TVD Reference:
MD Reference:
North Reference:

Survey Calculation Method:

Well L-9-9-16

L-9-9-16 @ 5734.0ft (Newfield Rig) L-9-9-16 @ 5734.0ft (Newfield Rig)

True

Minimum Curvature

Project USGS Myton SW (UT), DUCHESNE COUNTY, UT, USA

Map System: US State Plane 1983

Geo Datum: North American Datum 1983

Map Zone: Utah Central Zone

System Datum: Mean Sea Level

**Site** SECTION 9 T9S, R16E, SEC 9 T 9S, R16E

7,188,127.00 ft Northing: 40° 2' 42.503 N Site Position: Latitude: Easting: 2,025,493.00 ft 110° 7' 27.974 W From: Мар Longitude: **Position Uncertainty:** 0.0 ft Slot Radius: **Grid Convergence:** 0.88

Well L-9-9-16, SHL LAT:40 02 51.38 LONG: -110 07 02.05

**Well Position** +N/-S 898.1 ft Northing: 7,189,056.19 ft Latitude: 40° 2' 51.380 N +E/-W 2,016.0 ft 2,027,494.87 ft 110° 7' 2.050 W Easting: Longitude: **Position Uncertainty** 0.0 ft Wellhead Elevation: **Ground Level:** 5,722.0 ft 5,734.0 ft

Wellbore #1 Wellbore Magnetics **Model Name** Sample Date Declination Dip Angle Field Strength (°) (°) (nT) 2011/06/25 65.79 IGRF2010 11.33 52,260

Design	Design #1					
Audit Notes:						
Version:		Phase:	PROTOTYPE	Tie On Depth:	0.0	
Vertical Section:		Depth From (TVD) (ft)	+N/-S (ft)	+E/-W (ft)	Direction (°)	
		5,200.0	0.0	0.0	220.75	

Plan Sections										
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)	TFO (°)	Target
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.00	0.00	
600.0	0.00	0.00	600.0	0.0	0.0	0.00	0.00	0.00	0.00	
1,594.3	14.91	220.75	1,583.1	-97.5	-84.0	1.50	1.50	0.00	220.75	
5,337.3	14.91	220.75	5,200.0	-827.3	-712.9	0.00	0.00	0.00	0.00	L-9-9-16 TGT
6,439.4	14.91	220.75	6,265.0	-1,042.2	-898.0	0.00	0.00	0.00	0.00	



#### PayZone Directional Services, LLC.

**Planning Report** 



Database: EDM 2003.21 Single User Db Company: NEWFIELD EXPLORATION Project: USGS Myton SW (UT)
Site: SECTION 9 T9S, R16E

 Well:
 L-9-9-16

 Wellbore:
 Wellbore #1

 Design:
 Design #1

Local Co-ordinate Reference:

TVD Reference:
MD Reference:
North Reference:

Survey Calculation Method:

Well L-9-9-16

L-9-9-16 @ 5734.0ft (Newfield Rig) L-9-9-16 @ 5734.0ft (Newfield Rig)

True

Minimum Curvature

sign:	Design #1								
anned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00
100.0	0.00	0.00	100.0	0.0	0.0	0.0	0.00	0.00	0.00
200.0	0.00	0.00	200.0	0.0	0.0	0.0	0.00	0.00	0.00
300.0	0.00	0.00	300.0	0.0	0.0	0.0	0.00	0.00	0.00
400.0	0.00	0.00	400.0	0.0	0.0	0.0	0.00	0.00	0.00
500.0	0.00	0.00	500.0	0.0	0.0	0.0	0.00	0.00	0.00
600.0	0.00	0.00	600.0	0.0	0.0	0.0	0.00	0.00	0.00
700.0	1.50	220.75	700.0	-1.0	-0.9	1.3	1.50	1.50	0.00
800.0	3.00	220.75	799.9	-4.0	-3.4	5.2	1.50	1.50	0.00
900.0	4.50	220.75	899.7	-8.9	-7.7	11.8	1.50	1.50	0.00
1,000.0	6.00	220.75	999.3	-15.9	-13.7	20.9	1.50	1.50	0.00
1,100.0		220.75	1,098.6	-24.8	-21.3	32.7			0.00
	7.50						1.50	1.50	
1,200.0	9.00	220.75	1,197.5	-35.6	-30.7	47.0	1.50	1.50	0.00
1,300.0	10.50	220.75	1,296.1	-48.5	-41.8	64.0	1.50	1.50	0.00
1,400.0	12.00	220.75	1,394.2	-63.2	-54.5	83.5	1.50	1.50	0.00
1,500.0	13.50	220.75	1,491.7	-80.0	-68.9	105.5	1.50	1.50	0.00
1,594.3	14.91	220.75	1,583.1	-97.5	-84.0	128.7	1.50	1.50	0.00
1.600.0	14.91	220.75	1,588.6	-98.6	-85.0	130.1	0.00	0.00	0.00
1,700.0	14.91	220.75	1,685.2	-118.1	-101.8	155.9	0.00	0.00	0.00
1,800.0	14.91	220.75	1,781.9	-116.1	-101.6	181.6	0.00	0.00	0.00
1,900.0	14.91	220.75	1,878.5	-157.1	-135.4	207.4	0.00	0.00	0.00
2,000.0	14.91	220.75	1,975.1	-176.6	-152.2	233.1	0.00	0.00	0.00
2,100.0	14.91	220.75	2,071.8	-196.1	-169.0	258.8	0.00	0.00	0.00
2,200.0	14.91	220.75	2,168.4	-215.6	-185.8	284.6	0.00	0.00	0.00
2,300.0	14.91	220.75	2,265.0	-235.1	-202.6	310.3	0.00	0.00	0.00
2,400.0	14.91	220.75	2,361.7	-254.6	-219.4	336.1	0.00	0.00	0.00
,			,						
2,500.0	14.91	220.75	2,458.3	-274.1	-236.2	361.8	0.00	0.00	0.00
2,600.0	14.91	220.75	2,554.9	-293.6	-253.0	387.5	0.00	0.00	0.00
2,700.0	14.91	220.75	2,651.6	-313.1	-269.8	413.3	0.00	0.00	0.00
2,800.0	14.91	220.75	2,748.2	-332.6	-286.6	439.0	0.00	0.00	0.00
2,900.0	14.91	220.75	2,844.8	-352.1	-303.4	464.7	0.00	0.00	0.00
3,000.0	14.91	220.75	2,941.4	-371.6	-320.2	490.5	0.00	0.00	0.00
3,100.0	14.91	220.75	3,038.1	-391.1	-337.0	516.2	0.00	0.00	0.00
			,						
3,200.0	14.91	220.75	3,134.7	-410.6	-353.8	542.0	0.00	0.00	0.00
3,300.0	14.91	220.75	3,231.3	-430.1	-370.6	567.7	0.00	0.00	0.00
3,400.0	14.91	220.75	3,328.0	-449.6	-387.4	593.4	0.00	0.00	0.00
3,500.0	14.91	220.75	3,424.6	-469.1	-404.2	619.2	0.00	0.00	0.00
3,600.0	14.91	220.75	3,521.2	-488.6	-421.0	644.9	0.00	0.00	0.00
3,700.0	14.91	220.75	3,617.9	-508.1	-437.8	670.7	0.00	0.00	0.00
3,800.0	14.91	220.75	3,714.5	-527.6	-454.6	696.4	0.00	0.00	0.00
3,900.0	14.91	220.75	3,811.1	-547.1	-471.4	722.1	0.00	0.00	0.00
4,000.0	14.91	220.75	3,907.8	-566.6	-488.2	747.9	0.00	0.00	0.00
4,100.0	14.91	220.75	4,004.4	-586.1	-505.0	773.6	0.00	0.00	0.00
4,200.0	14.91	220.75	4,101.0	-605.6	-521.8	799.3	0.00	0.00	0.00
4,300.0	14.91	220.75	4,197.7	-625.1	-538.6	825.1	0.00	0.00	0.00
4,400.0	14.91	220.75	4,294.3	-644.6	-555.4	850.8	0.00	0.00	0.00
4,500.0	14.91	220.75	4,390.9	-664.1	-572.2	876.6	0.00	0.00	0.00
4,600.0	14.91	220.75	4,487.5	-683.6	-589.0	902.3	0.00	0.00	0.00
4,700.0	14.91	220.75	4,584.2	-703.1	-605.8	928.0	0.00	0.00	0.00
4,800.0	14.91	220.75	4,680.8	-722.5	-622.6	953.8	0.00	0.00	0.00
4,900.0	14.91	220.75	4,777.4	-742.0	-639.4	979.5	0.00	0.00	0.00
5,000.0	14.91	220.75	4,874.1	-761.5	-656.2	1,005.3	0.00	0.00	0.00
5,100.0	14.91	220.75	4,970.7	-781.0	-673.0	1,031.0	0.00	0.00	0.00
5,200.0	14.91	220.75	5,067.3	-800.5	-689.8	1,056.7	0.00	0.00	0.00



#### PayZone Directional Services, LLC.

Planning Report



Database: EDM 2003.21 Single User Db Company: NEWFIELD EXPLORATION Project: USGS Myton SW (UT)
Site: SECTION 9 T9S, R16E

 Well:
 L-9-9-16

 Wellbore:
 Wellbore #1

 Design:
 Design #1

Local Co-ordinate Reference:

TVD Reference: MD Reference: North Reference:

Survey Calculation Method:

Well L-9-9-16

L-9-9-16 @ 5734.0ft (Newfield Rig) L-9-9-16 @ 5734.0ft (Newfield Rig)

True

Minimum Curvature

ed Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
5,300.0	14.91	220.75	5,164.0	-820.0	-706.6	1,082.5	0.00	0.00	0.00
5,337.3	14.91	220.75	5,200.0	-827.3	-712.9	1,092.1	0.00	0.00	0.00
5,400.0	14.91	220.75	5,260.6	-839.5	-723.4	1,108.2	0.00	0.00	0.00
5,500.0	14.91	220.75	5,357.2	-859.0	-740.2	1,133.9	0.00	0.00	0.00
5,600.0	14.91	220.75	5,453.9	-878.5	-757.0	1,159.7	0.00	0.00	0.00
5,700.0	14.91	220.75	5,550.5	-898.0	-773.8	1,185.4	0.00	0.00	0.00
5,800.0	14.91	220.75	5,647.1	-917.5	-790.6	1,211.2	0.00	0.00	0.00
5,900.0	14.91	220.75	5,743.7	-937.0	-807.4	1,236.9	0.00	0.00	0.00
6,000.0	14.91	220.75	5,840.4	-956.5	-824.2	1,262.6	0.00	0.00	0.00
6,100.0	14.91	220.75	5,937.0	-976.0	-841.0	1,288.4	0.00	0.00	0.00
6,200.0	14.91	220.75	6,033.6	-995.5	-857.8	1,314.1	0.00	0.00	0.00
6,300.0	14.91	220.75	6,130.3	-1,015.0	-874.6	1,339.9	0.00	0.00	0.00
6,400.0	14.91	220.75	6,226.9	-1,034.5	-891.4	1,365.6	0.00	0.00	0.00
6,439.4	14.91	220.75	6,265.0	-1,042.2	-898.0	1,375.7	0.00	0.00	0.00

API Well Number: 43013511730000
Project: USGS Myton SW (UT)



Site: SECTION 9 T9S, R16E


Well: L-9-9-16 Wellbore: Wellbore #1 Design: Design #1

DOGLEG RATE 1.5 DEG/100 TARGET RADIUS IS 75'




Azimuths to True North Magnetic North: 11.33°

Magnetic Field Strength: 52259.6snT Dip Angle: 65.79° Date: 2011/06/25 Model: IGRF2010

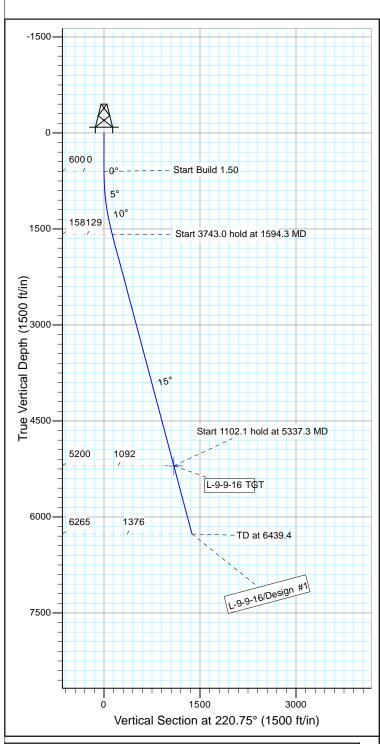





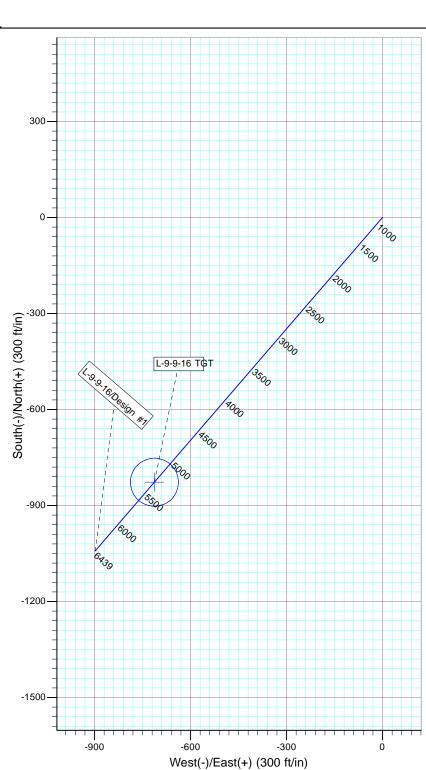

+E/-W DLeg TFace 0.0 0.00 0.00 0.0 0.00 0.00 -84.0 1.50 220.75 +N/-S VSec Target 0.0 0.00 0.00 600.0 0.00 0.00 1594.3 14.91 220.75 0.0 600.0 1583.1 0.0 0.0 -97.5 0.0 0.0 128.7 5337.3 14.91 220.75 5200.0 -827.3 6439.4 14.91 220.75 6265.0 -1042.2 -712.9 0.00 0.001092.1 L-9-9-16 TGT -898.0 0.00

SECTION DETAILS

# NEWFIELD PRODUCTION COMPANY GMBU L-9-9-16 AT SURFACE: SE/NE SECTION 9, T9S R16E DUCHESNE COUNTY, UTAH

#### ONSHORE ORDER NO. 1

#### MULTI-POINT SURFACE USE & OPERATIONS PLAN

#### 1. EXISTING ROADS

See attached Topographic Map "A"

To reach Newfield Production Company well location site GMBU L-9-9-16 located in the SE1/4 NE 1/4 Section 9, T9S R16E, Duchesne County, Utah:

Proceed southwesterly out of Myton, Utah along Highway 40-1.4 miles  $\pm$  to the junction of this highway and UT State Hwy 53; proceed in a southeasterly direction -6.2 miles  $\pm$  to it's junction with an existing road to the southwest; proceed in a southwesterly direction -5.5 miles  $\pm$  to it's junction with an existing road to the southeast; proceed in a southeasterly direction -2.2 miles  $\pm$  to it's junction with an existing road to the south; proceed in a southerly direction -0.05 miles  $\pm$  to the existing 8-9-9-16 well location.

The aforementioned dirt oil field service roads and other roads in the vicinity are constructed out of existing native materials that are prevalent to the existing area they are located in and range from clays to a sandy-clay shale material.

The roads for access during the drilling, completion and production phase will be maintained at the standards required by the State of Utah, or other controlling agencies. This maintenance will consist of some minor grader work for smoothing road surfaces and for snow removal. Any necessary fill material for repair will be purchase and hauled from private sources.

#### 2. PLANNED ACCESS ROAD

There is no proposed access road for this location. The proposed well will be drilled directionaly off of the existing 8-9-9-16 well pad. See attached **Topographic Map "B"**.

There will be **no** culverts required along this access road. There will be barrow ditches and turnouts as needed along this road.

There are no fences encountered along this proposed road. There will be no new gates or cattle guards required.

All construction material for this access road will be borrowed material accumulated during construction of the access road.

#### 3. LOCATION OF EXISTING WELLS

Refer to Exhibit "B".

#### 4. LOCATION OF EXISTING AND/OR PROPOSED FACILITIES

There are no existing facilities that will be used by this well.

It is anticipated that this well will be a producing oil well.

Upon construction of a tank battery, the well pad will be surrounded by a dike of sufficient capacity to contain at minimum 110% of the largest tank volume within the facility battery.

Tank batteries will be built to State specifications.

All permanent (on site for six (6) months or longer) structures, constructed or installed (including pumping units), will be painted a flat, non-reflective, earth tone color to match one of the standard environmental colors, as determined by the Rocky Mountain Five State Interagency Committee. All facilities will be painted within six months of installation.

#### 5. LOCATION AND TYPE OF WATER SUPPLY

Newfield Production will transport water by truck from nearest water source as determined by a Newfield representative for the purpose of drilling the above mentioned well. The available water sources are as follows:

Johnson Water District Water Right: 43-10136

Maurice Harvey Pond Water Right: 47-1358

Neil Moon Pond Water Right: 43-11787

Newfield Collector Well

Water Right: 47-1817 (A30414DVA, contracted with the Duchesne County Conservancy

District).

There will be no water well drilled at this site.

#### 6. SOURCE OF CONSTRUCTION MATERIALS

All construction material for this location shall be borrowed material accumulated during construction of the location site and access road.

A mineral material application is not required for this location.

#### 7. METHODS FOR HANDLING WASTE DISPOSAL

A small reserve pit (90' x 40' x 8' deep, or less) will be constructed from native soil and clay materials. The reserve pit will receive the processed drill cutting (wet sand, shale & rock) removed from the wellbore. Any drilling fluids, which do accumulate in the pit as a result of shale-shaker carryover, cleaning of the sand trap, etc., will be promptly reclaimed. All drilling fluids will be fresh water based, typically containing Total Dissolved Solids of less than 3000 PPM. No potassium chloride, chromates, trash, debris, nor any other substance deemed hazardous will be placed in this pit. Therefore, it is proposed that no synthetic liner be required in the reserve pit. However, if upon constructing the pit there is insufficient fine clay and silt present, a liner will be used for the purpose of reducing water loss through percolation.

Newfield requests approval that a flare pit not be constructed or utilized on this location.

A portable toilet will be provided for human waste.

A trash basket will be provided for garbage (trash) and hauled away to an approved disposal site at the completion of the drilling activities.

#### 8. ANCILLARY FACILITIES

There are no ancillary facilities planned for at the present time and none foreseen in the near future.

#### 9. <u>WELL SITE LAYOUT</u>

See attached Location Layout Sheet.

#### **Fencing Requirements**

All pits will be fenced according to the following minimum standards:

- a) A 39-inch net wire shall be used with at least one strand of barbed wire on top of the net.
- b) The net wire shall be no more than two (2) inches above the ground. The barbed wire shall be three (3) inches above the net wire. Total height of the fence shall be at least forty-two (42) inches.
- c) Corner posts shall be centered and/or braced in such a manner to keep tight at all times
- d) Standard steel, wood or pipe posts shall be used between the corner braces. Maximum distance between any two posts shall be no greater than sixteen (16) feet.
- e) All wire shall be stretched, by using a stretching device, before it is attached to the corner posts.

The reserve pit fencing will be on three (3) sides during drilling operations and on the fourth side when the rig moves off location. Pits will be fenced and maintained until cleanup.

Existing fences to be crossed by the access road will be braced and tied off before cutting so as to prevent slacking in the wire. The opening shall be closed temporarily as necessary during construction to prevent the escape of livestock, and upon completion of construction the fence shall be repaired to BLM specifications.

#### 10. PLANS FOR RESTORATION OF SURFACE:

#### a) Producing Location

Immediately upon well completion, the location and surrounding area will be cleared of all unused tubing, equipment, debris, material, trash and junk not required for production.

The reserve pit and that portion of the location not needed for production facilities/operations will be recontoured to the approximated natural contours. Weather permitting, the reserve pit will be reclaimed within one hundred twenty (120) days from the date of well completion. Before any dirt work takes place, the reserve pit must have all fluids and hydrocarbons removed.

#### b) Dry Hole Abandoned Location

At such time as the well is plugged and abandoned, the operator shall submit a subsequent report of abandonment and the State of Utah will attach the appropriate surface rehabilitation conditions of approval.

#### 11. <u>SURFACE OWNERSHIP</u> – Bureau of Land Management.

#### 12. OTHER ADDITIONAL INFORMATION

The Archaeological Resource Survey and Paleontological Resource Survey for this area are attached. State of Utah Antiquities Project Permit #U-06-MQ-1251b 8/28/06, prepared by

Montgomery Archaeological Consultants. Paleontological Resource Survey prepared by, Wade E. Miller, 6/29/05. See attached report cover pages, Exhibit "D".

#### Water Disposal

After first production, if the production water meets quality guidelines, it will be transported to the Ashley, Monument Butte, Jonah, South Wells Draw and Beluga water injection facilities by company or contract trucks. Subsequently, the produced water is injected into approved Class II wells to enhance Newfield's secondary recovery project. Water not meeting quality criteria, will be disposed at Newfield's Pariette #4 disposal well (Sec. 7, T9S R19E), Federally approved surface disposal facilities or at a State of Utah approved surface disposal facilities.

#### **Additional Surface Stipulations**

All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws and regulations, Onshore Oil and Gas Orders, the approved plan of operations and any applicable Notice to Lessees. A copy of these conditions will be furnished to the field representative to ensure compliance.

#### **Details of the On-Site Inspection**

The proposed GMBU L-9-9-16 was on-sited on 11/10/11. The following were present; Tim Eaton (Newfield Production), Christine Cimiluca (Bureau of Land Management), and Suzanne Grayson (Bureau of Land Management). Weather conditions were clear and ground cover was 100% open.

#### **Hazardous Material Declaration**

Newfield Production Company guarantees that during the drilling and completion of the GMBU L-9-9-16, Newfield will not use, produce, store, transport or dispose 10,000# annually of any of the hazardous chemicals contained in the Environmental Protection Agency's consolidated list of chemicals subject to reporting under Title III Superfund Amendments and Reauthorization Act (SARA) of 1986. Newfield also guarantees that during the drilling and completion of the GMBU L-9-9-16, Newfield will use, produce, store, transport or dispose less than the threshold planning quantity (T.P.Q.) of any extremely hazardous substances as defined in 40 CFR 355.

A complete copy of the approved APD, if applicable, shall be on location during the construction of the location and drilling activities.

Newfield Production Company or a contractor employed by Newfield Production shall contact the State office at (801) 722-3417, 48 hours prior to construction activities.

#### 13. LESSEE'S OR OPERATOR'S REPRENSENTATIVE AND CERTIFICATION:

#### Representative

Name: Tim Eaton

Address: Newfield Production Company

Route 3, Box 3630 Myton, UT 84052

Telephone: (435) 646-3721


#### Certification

Please be advised that NEWFIELD PRODUCTION COMPANY is considered to be the operator of well # L-9-9-16, Section 9, Township 9S, Range 16E: Lease UTU-65207 Duchesne County, Utah: and is responsible under the terms and conditions of the lease for the operations conducted upon the leased lands. Bond coverage is provided by, Federal Bond #WYB000493.


I hereby certify that the proposed drill site and access route have been inspected, and I am familiar with the conditions which currently exist; that the statements made in this plan are true and correct to the best of my knowledge; and that the work associated with the operations proposed here will be performed by Newfield Production Company and its contractors and subcontractors in conformity with this plan and the terms and


conditions under which it is approved. This for the filing of a false statement.	statement is subject to the provisions of the 18 U.S.C. 1001
1/9/2012	
Date	Tim Eator
	Regulatory Analys
	Newfield Production Company


#### **Typical 2M BOP stack configuration**

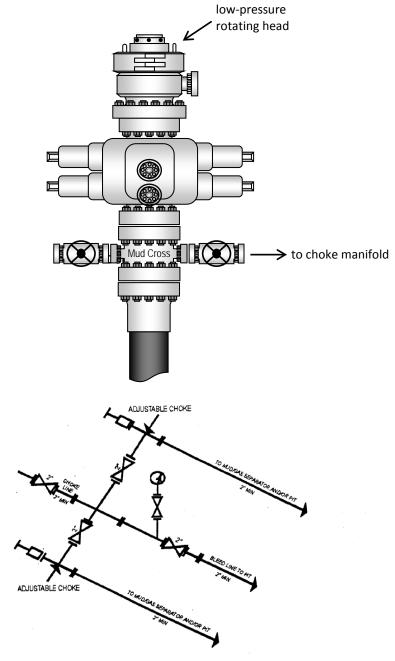



2M CHOKE MANIFOLD EQUIPMENT - CONFIGURATION OF CHOKES MAY VARY

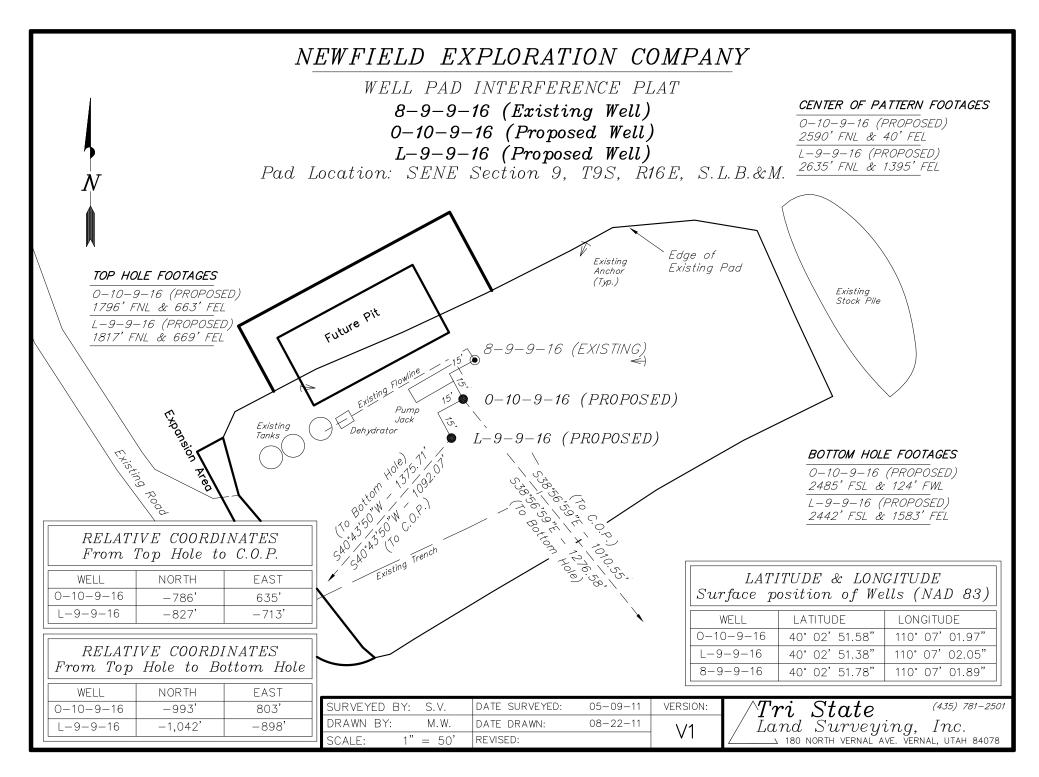

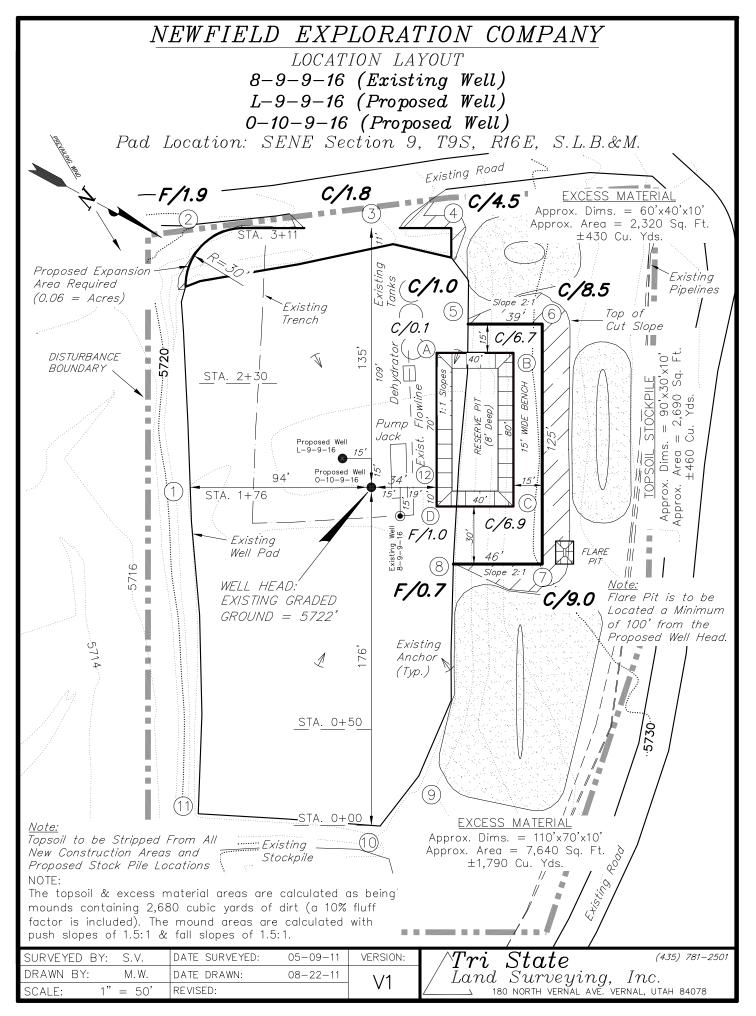

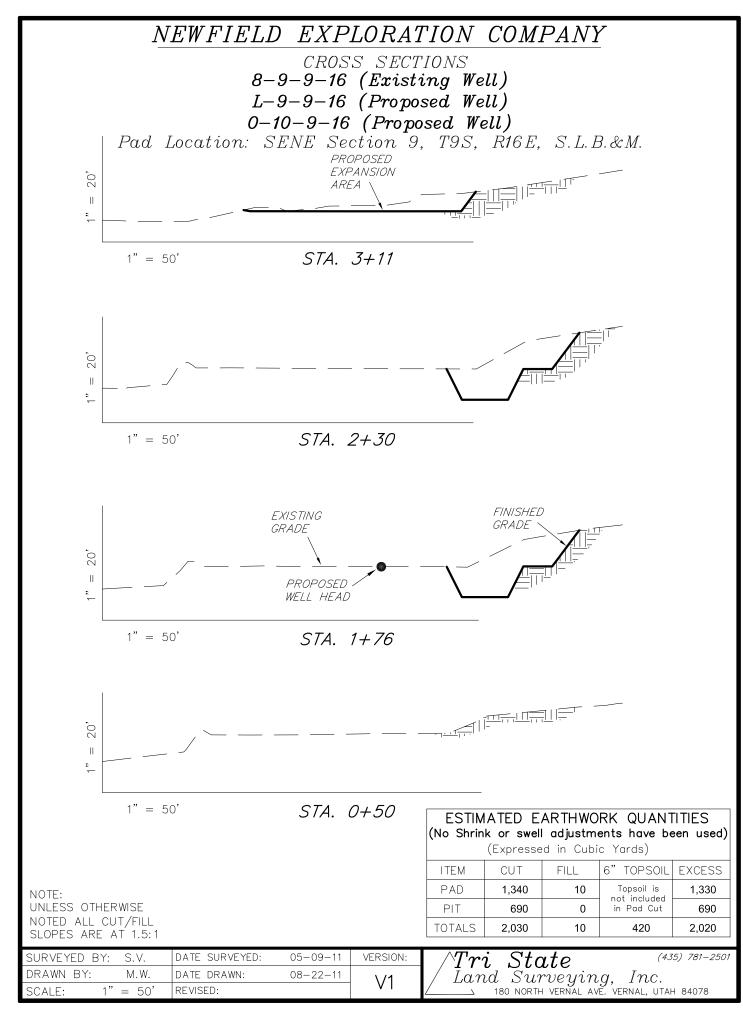

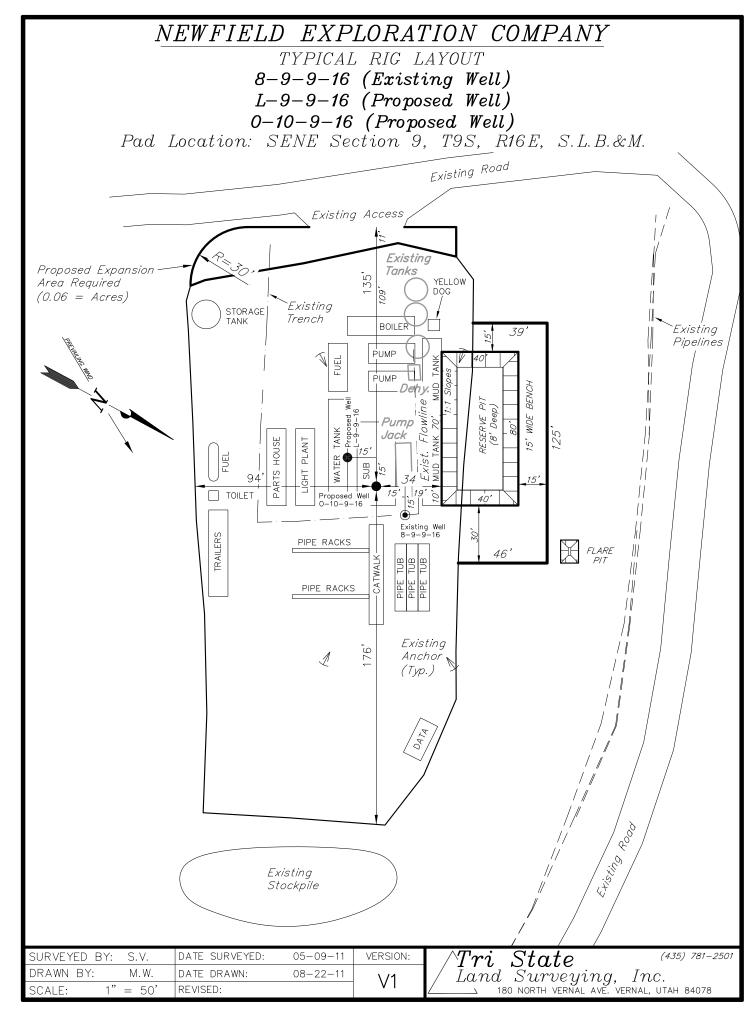

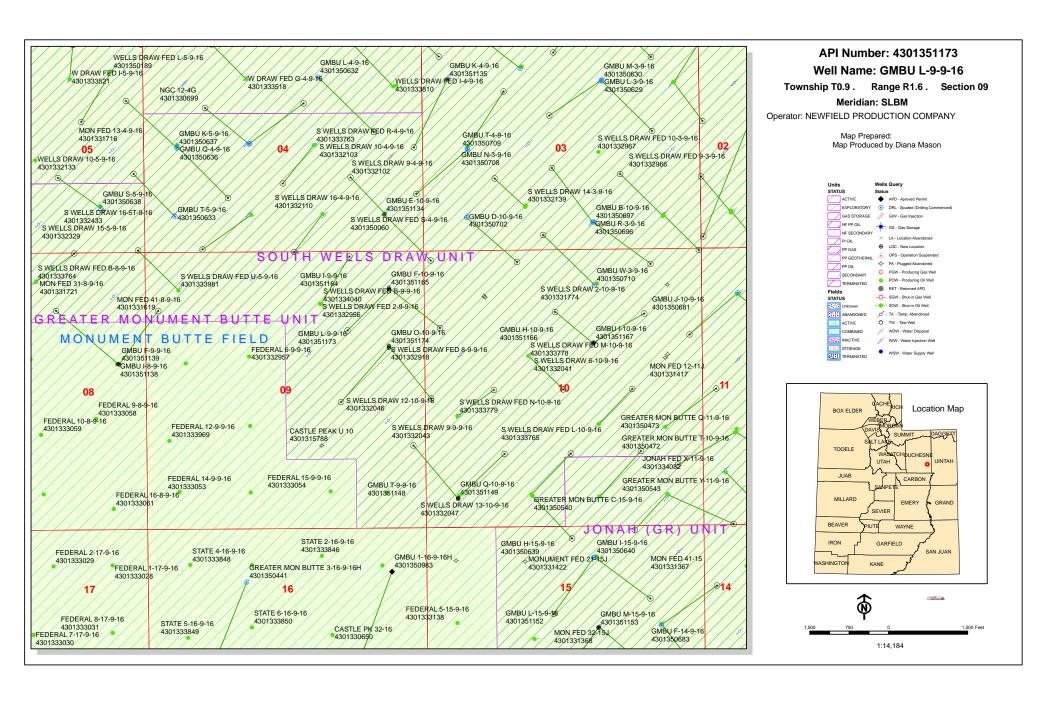

# **United States Department of the Interior**

#### BUREAU OF LAND MANAGEMENT

Utah State Office P.O. Box 45155 Salt Lake City, Utah 84145-0155

IN REPLY REFER TO: 3160 (UT-922)

January 12, 2012

#### Memorandum

To: Assistant District Manager Minerals, Vernal District

From: Michael Coulthard, Petroleum Engineer

Subject: 2012 Plan of Development Greater Monument

Butte Unit, Duchesne and Uintah Counties,

Utah.

Pursuant to email between Diana Whitney, Division of Oil, Gas and Mining, and Mickey Coulthard, Utah State Office, Bureau of Land Management, the following wells are planned for calendar year 2012 within the Greater Monument Butte Unit, Duchesne and Uintah Counties, Utah.

API # WELL NAME LOCATION

(Proposed PZ GREEN RIVER)

43-013-51164 GMBU I-9-9-16 Sec 09 T09S R16E 0709 FNL 0655 FEL BHL Sec 09 T09S R16E 1483 FNL 1446 FEL

43-013-51165 GMBU F-10-9-16 Sec 09 T09S R16E 0688 FNL 0654 FEL

BHL Sec 10 T09S R16E 1446 FNL 0310 FWL

43-013-51166 GMBU H-10-9-16 Sec 10 T09S R16E 1775 FNL 2045 FEL BHL Sec 10 T09S R16E 1164 FNL 2501 FWL

43-013-51167 GMBU I-10-9-16 Sec 10 T09S R16E 1755 FNL 2038 FEL BHL Sec 10 T09S R16E 1212 FNL 1070 FEL

43-013-51168 GMBU G-17-9-16 Sec 17 T09S R16E 1897 FNL 0863 FWL

BHL Sec 17 T09S R16E 0969 FNL 1743 FWL

43-013-51169 GMBU J-18-9-16 Sec 17 T09S R16E 1876 FNL 0858 FWL BHL Sec 18 T09S R16E 1055 FNL 0155 FEL

43-013-51170 GMBU G-18-9-16 Sec 18 T09S R16E 1948 FNL 1972 FWL

BHL Sec 18 T09S R16E 1261 FNL 0899 FWL

43-013-51171 GMBU H-18-9-16 Sec 18 T09S R16E 1937 FNL 1990 FWL BHL Sec 18 T09S R16E 1117 FNL 2471 FEL

43-013-51173 GMBU L-9-9-16 Sec 09 T09S R16E 1817 FNL 0669 FEL BHL Sec 09 T09S R16E 2848 FNL 1583 FEL

RECEIVED: January 12, 2012

This office has no objection to permitting the wells at this time.

Michael L. Coulthard

Digitally signed by Michael L. Coulthard

Dis: cn=Michael L. Coulthard, District Coulthard District Coulthard District Coulthard Coulthard District Coulthard Coulthard District Coulthard Coultha

bcc: File - Greater Monument Butte Unit Division of Oil Gas and Mining

Central Files Agr. Sec. Chron Fluid Chron

MCoulthard:mc:1-12-12



#### VIA ELECTRONIC DELIVERY

January 12, 2012

State of Utah, Division of Oil, Gas and Mining ATTN: Diana Mason P.O. Box 145801 Salt Lake City, UT 84114-5801

RE: Directional Drilling

GMBU L-9-9-16

Greater Monument Butte (Green River) Unit

Surface Hole:

T9S-R16E Section 9: SENE (UTU-65207)

1817' FNL 669' FEL

At Target:

T9S-R16E Section 9: NWSE (UTU-40894)

2848' FNL 1583' FEL

Duchesne County, Utah

Dear Ms. Mason:

Pursuant to the filing by Newfield Production Company (NPC) of an Application for Permit to Drill the above referenced well dated 1/12/2012, a copy of which is attached, and in accordance with Oil and Gas Conservation Rule R649-3-11, NPC hereby submits this letter as notice of our intention to directionally drill this well.

The surface hole and target locations of this well are both within the boundaries of the Greater Monument Butte Unit (UTU-87538X), of which Newfield certifies that it is the operator. Further, Newfield certifies that all lands within 460 feet of the entire directional well bore are within the Greater Monument Butte Unit.

NPC is permitting this well as a directional well in order to mitigate surface disturbance by utilizing preexiting roads and pipelines.

NPC hereby requests our application for permit to drill be granted pursuant to R649-3-11. If you have any questions or require further information, please contact the undersigned at 303-383-4153 or by email at <a href="mailto:pburns@newfield.com">pburns@newfield.com</a>. Your consideration in this matter is greatly appreciated.

Sincerely,

Newfield Production Company

Peter Burns Land Associate


	August 2007) UNITED STATES DEPARTMENT OF THE INTERIOR						
BUREAU OF LAND			5. Lease Serial No. UTU65207				
APPLICATION FOR PERMIT	TO DRILL OR RE	ENTER	6. If Indian, Allottee or Tribe Name				
1a. Type of Work: ☑ DRILL ☐ REENTER			7. If Unit or CA Agreement, GREATER MONUM	Name and No. ENT			
1b. Type of Well: ☑ Oil Well ☐ Gas Well ☐ Oth	ner 🔀 Sing	gle Zone	8. Lease Name and Well No GMBU L-9-9-16				
2. Name of Operator Contact: NEWFIELD EXPLORATION E-Mail: teaton@	TIM EATON enewfield.com		9. API Well No.				
3a. Address ROUTE 3 BOX 3630 MYTON, UT 84052	ROUTE 3 BOX 3630 Ph: 435-823-1932						
4. Location of Well (Report location clearly and in accorda	nce with any State requi	irements.*)	11. Sec., T., R., M., or Blk.	and Survey or Area			
At surface SENE 1817FNL 669FEL	Sec 9 T9S R16E Me	r SLB					
At proposed prod. zone NWSE 2848FNL 1583FEL							
14. Distance in miles and direction from nearest town or post 15.4	office*		12. County or Parish DUCHESNE	13. State UT			
15. Distance from proposed location to nearest property or lease line, ft. (Also to nearest drig, unit line, if any)	16. No. of Acres in L	ease	17. Spacing Unit dedicated t	o this well			
669'	280.00		20.00				
18. Distance from proposed location to nearest well, drilling, completed, applied for, on this lease, ft.	19. Proposed Depth	<del></del>	20. BLM/BIA Bond No. on	file			
1245'	6439 MD 6265 TVD		WYB000493				
21. Elevations (Show whether DF, KB, RT, GL, etc. 5722 GL	22. Approximate date 04/01/2012	work will start	23. Estimated duration 7 DAYS				
	24. Atta	achments					
The following, completed in accordance with the requirements o	f Onshore Oil and Gas C	Order No. 1, shall be attached to the	nis form:				
<ol> <li>Well plat certified by a registered surveyor.</li> <li>A Drilling Plan.</li> <li>A Surface Use Plan (if the location is on National Forest Systems SUPO shall be filed with the appropriate Forest Service Offenders).</li> </ol>	em Lands, the ice).	4. Bond to cover the operation Item 20 above). 5. Operator certification 6. Such other site specific info authorized officer.					
25. Signature (Electronic Submission)	Name (Printed/Typcd) TIM EATON P	h: 435-823-1932		Date 01/12/2012			
Title SUBMITTING CONTACT							
Approved by (Signature)	Name (Printed/Typed)			Date			
Title	Office						
Application approval does not warrant or certify the applicant ho operations thereon.  Conditions of approval, if any, are attached.	lds legal or equitable titl	e to those rights in the subject lea	se which would entitle the app	licant to conduct			
Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, n States any false, fictitious or fraudulent statements or representati	nake it a crime for any poons as to any matter wit	erson knowingly and willfully to hin its jurisdiction.	make to any department or age	ncy of the United			


Additional Operator Remarks (see next page)

Electronic Submission #127995 verified by the BLM Well Information System For NEWFIELD EXPLORATION, sent to the Vernal

#### **Additional Operator Remarks:**

Surface Lease: UTU-65207 Bottom Hole Lease: UTU-40894

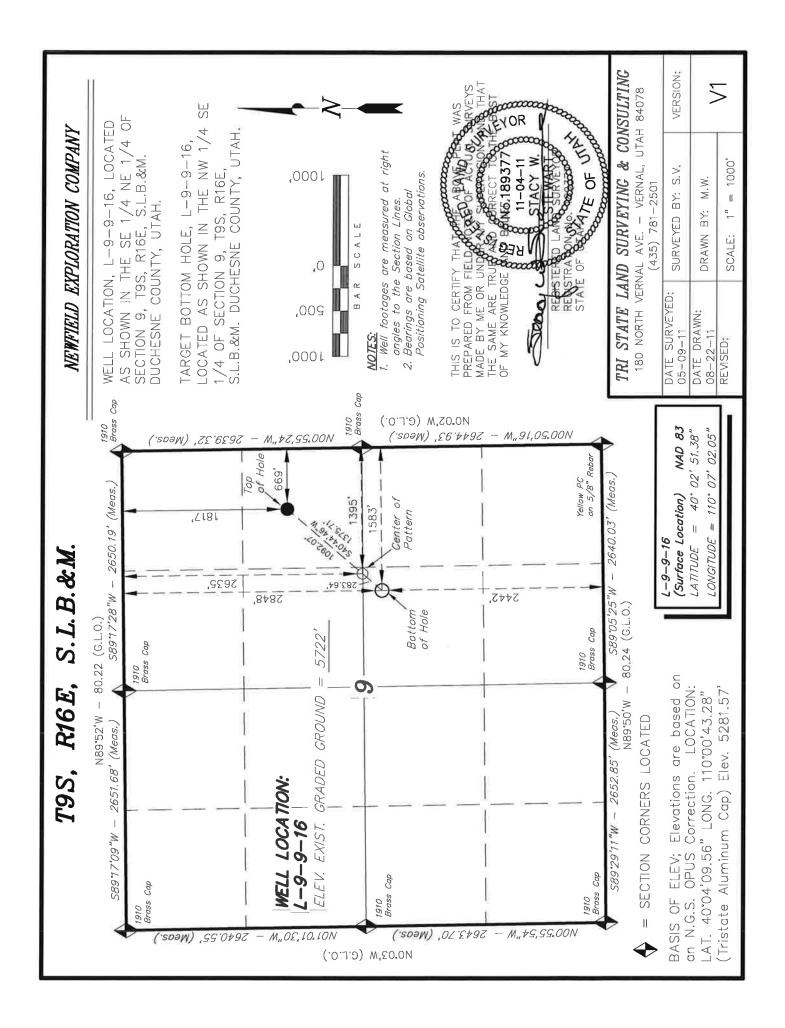

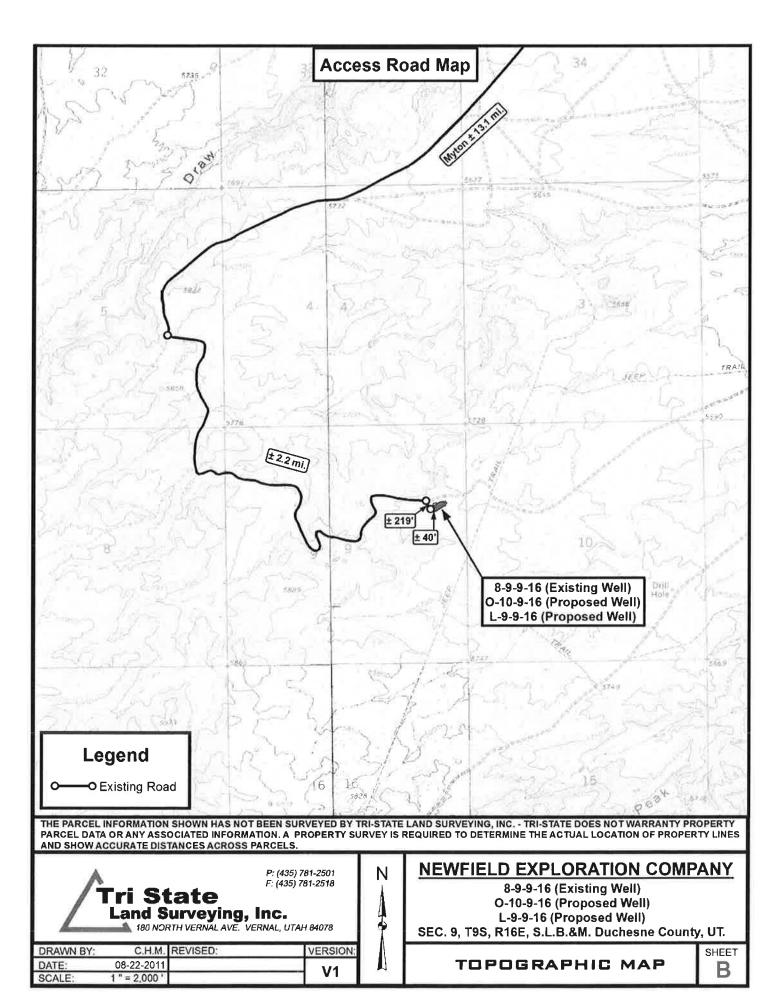

# WORKSHEET APPLICATION FOR PERMIT TO DRILL

<b>APD RECEIVED:</b> 1/11/2012	API NO. ASSIGNED:	43013511730000

WELL NAME: GMBU L-9-9-16

**OPERATOR:** NEWFIELD PRODUCTION COMPANY (N2695) **PHONE NUMBER:** 465 646-4858

**CONTACT:** Tim Eaton

PROPOSED LOCATION: SENE 09 090S 160E Permit Tech Review:

SURFACE: 1817 FNL 0669 FEL Engineering Review:

BOTTOM: 2848 FNL 1583 FEL Geology Review: 

✓

COUNTY: DUCHESNE

LATITUDE: 40.04754 LONGITUDE: -110.11731

**UTM SURF EASTINGS:** 575294.00 **NORTHINGS:** 4433407.00

FIELD NAME: MONUMENT BUTTE

LEASE TYPE: 1 - Federal

**LEASE NUMBER:** UTU-65207 **PROPOSED PRODUCING FORMATION(S):** GREEN RIVER

SURFACE OWNER: 1 - Federal COALBED METHANE: NO

**RECEIVED AND/OR REVIEWED: LOCATION AND SITING:** ✓ PLAT R649-2-3. Unit: GMBU (GRRV) Bond: FEDERAL - WYB000493 **Potash** R649-3-2. General Oil Shale 190-5 Oil Shale 190-3 R649-3-3. Exception Oil Shale 190-13 **Drilling Unit** Board Cause No: Cause 213-11 Water Permit: 437478 Effective Date: 11/30/2009 **RDCC Review:** Siting: Suspends General Siting Fee Surface Agreement

Intent to Commingle R649-3-11. Directional Drill

Commingling Approved


Comments: Presite Completed

Stipulations: 4 - Federal Approval - dmason

15 - Directional - dmason

27 - Other - bhill

API Well No: 43013511730000



## State of Utah

DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER
Executive Director

Division of Oil, Gas and Mining

JOHN R. BAZA
Division Director

#### Permit To Drill

\*\*\*\*\*

**Well Name:** GMBU L-9-9-16 **API Well Number:** 43013511730000

Lease Number: UTU-65207 Surface Owner: FEDERAL Approval Date: 1/12/2012

#### **Issued to:**

NEWFIELD PRODUCTION COMPANY, Rt 3 Box 3630, Myton, UT 84052

#### Authority:

Pursuant to Utah Code Ann. 40-6-1 et seq., and Utah Administrative Code R649-3-1 et seq., the Utah Division of Oil, Gas and Mining issues conditions of approval, and permit to drill the listed well. This permit is issued in accordance with the requirements of Cause 213-11. The expected producing formation or pool is the GREEN RIVER Formation(s), completion into any other zones will require filing a Sundry Notice (Form 9). Completion and commingling of more than one pool will require approval in accordance with R649-3-22.

#### **Duration:**

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date

#### General:

Compliance with the requirements of Utah Admin. R. 649-1 et seq., the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

#### **Conditions of Approval:**

State approval of this well does not supercede the required federal approval, which must be obtained prior to drilling.

In accordance with Utah Admin. R.649-3-11, Directional Drilling, the operator shall submit a complete angular deviation and directional survey report to the Division within 30 days following completion of the well.

Production casing cement shall be brought up to or above the top of the unitized interval for the Greater Monument Butte Unit (Cause No. 213-11).

#### **Notification Requirements:**

The operator is required to notify the Division of Oil, Gas and Mining of the following actions during drilling of this well:

• Within 24 hours following the spudding of the well contact Carol Daniels at 801-538-5284

API Well No: 43013511730000

(please leave a voicemail message if not available) OR

submit an electronic sundry notice (pre-registration required) via the Utah Oil & Gas website

at http://oilgas.ogm.utah.gov

#### Reporting Requirements:

All reports, forms and submittals as required by the Utah Oil and Gas Conservation General Rules will be promptly filed with the Division of Oil, Gas and Mining, including but not limited to:

- Entity Action Form (Form 6) due within 5 days of spudding the well
- Monthly Status Report (Form 9) due by 5th day of the following calendar month
- Requests to Change Plans (Form 9) due prior to implementation
- Written Notice of Emergency Changes (Form 9) due within 5 days
- Notice of Operations Suspension or Resumption (Form 9) due prior to implementation
  - Report of Water Encountered (Form 7) due within 30 days after completion
  - Well Completion Report (Form 8) due within 30 days after completion or plugging

Approved By:

For John Rogers Associate Director, Oil & Gas Form 3160-3 (August 2007)

# RECEIVED

**UNITED STATES** 

FORM APPROVED OMB No. 1004-0136 Expires July 31, 2010

BUREAU OF LAND	MANAGEMENT JAN 1 2 2012	5. Lease Serial No. UTU65207		
APPLICATION FOR PERMIT	TO DRILL OR REDITER	6. If Indian, Allottee or Tri	be Name	
1a. Type of Work: DRILL REENTER		7. If Unit or CA Agreemen UTU87538X	t, Name and No.	
1b. Type of Well: ☑ Oil Well ☐ Gas Well ☐ Oth	ner Single Zone  Multiple Zone	8. Lease Name and Well N GMBU L-9-9-16	Ō.	
2. Name of Operator Contact: NEWFIELD EXPLORATION COMPANA: teaton@	TIM EATON  Onewfield.com	9. API Well No. 43-013-5117		
3a. Address ROUTE 3 BOX 3630 MYTON, UT 84052	3b. Phone No. (include area code) Ph: 435-823-1932	10. Field and Pool, or Expl MONUMENT BUTTI	oratory	
4. Location of Well (Report location clearly and in accord	I ance with any State requirements.*)	11. Sec., T., R., M., or Blk.	and Survey or Area	
At surface SENE 1817FNL 669FEL 4 At proposed prod. zone NWSE 2442FSL 1583FEL	0.047606 N Lat, 110.117236 W Lon	Sec 9 T9S R16E Me SME: BLM	er SLB	
14. Distance in miles and direction from nearest town or post 15.4	office*	12. County or Parish DUCHESNE	13. State UT	
15. Distance from proposed location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 669'	16. No. of Acres in Lease	17. Spacing Unit dedicated 20.00	to this well	
<ol> <li>Distance from proposed location to nearest well, drilling, completed, applied for, on this lease, ft.</li> <li>1245<sup>t</sup></li> </ol>	19. Proposed Depth 6439 MD 6265 TVD	20. BLM/BIA Bond No. on file WYB000493		
21. Elevations (Show whether DF, KB, RT, GL, etc. 5722 GL	22. Approximate date work will start 04/01/2012	23. Estimated duration 7 DAYS		
	24. Attachments			
The following, completed in accordance with the requirements of	of Onshore Oil and Gas Order No. 1, shall be attached to	this form:		
<ol> <li>Well plat certified by a registered surveyor.</li> <li>A Drilling Plan.</li> <li>A Surface Use Plan (if the location is on National Forest Sys SUPO shall be filed with the appropriate Forest Service Of</li> </ol>	tem Lands, the fice).  4. Bond to cover the operation Item 20 above).  5. Operator certification 6. Such other site specific in authorized officer.	•		
25. Signature (Electronic Submission)	Name (Printed/Typed) TIM EATON Ph: 435-823-1932		Date 01/12/2012	
Title SUBMITTING CONTACT				
Approved by (Signature)	Name (Printed/Typed)  Jerry Kenczka		9UL 0 3 2012	
Assistant Field Manager Lands & Mineral Resources	VERNAL FIELD OFFICE			
Application approval does not warrant or certify the applicant hoperations thereon. Conditions of approval, if any, are attached.  CONDITION	S OF APPROVAL ATTACHED	lease which would entitle the a	applicant to conduct	

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

Additional Operator Remarks (see next page)

JUL 1 3 2012

Electronic Submission #127995 verified by the BLM Well Information System
For NEWFIELD EXPLORATION COMPANY, sent to the Vernal DIV. OF OIL, GAS & MINING
Committed to AFMSS for processing by LESLIE ROBINSON on 02/01/2012

NOTICE OF APPROVAL

\*\* BLM REVISED \*\* BLM REVISED \*\* BLM REVISED \*\* BLM REVISED \*\*

IVK-11/alle



## UNITED STATES DEPARTMENT OF THE INTERIOR **BUREAU OF LAND MANAGEMENT VERNAL FIELD OFFICE**

**VERNAL, UT 84078** 

(435) 781-4400



### CONDITIONS OF APPROVAL FOR APPLICATION FOR PERMIT TO DRILL

Company: Well No:

**Newfield Production Company** 

170 South 500 East

GMBU L-9-9-16

API No: 43-013-51173 Location:

SENE, Sec. 9, T9S, R16E

UTU-65207 Lease No:

Agreement: **Greater Monument Butte** 

**OFFICE NUMBER:** 

(435) 781-4400

**OFFICE FAX NUMBER: (435) 781-3420** 

### A COPY OF THESE CONDITIONS SHALL BE FURNISHED TO YOUR FIELD REPRESENTATIVE TO INSURE COMPLIANCE

All lease and/or unit operations are to be conducted in such a manner that full compliance is made with the applicable laws, regulations (43 CFR Part 3160), and this approved Application for Permit to Drill including Surface and Downhole Conditions of Approval. The operator is considered fully responsible for the actions of his subcontractors. A copy of the approved APD must be on location during construction, drilling, and completion operations. This permit is approved for a two (2) year period, or until lease expiration, whichever occurs first. An additional extension, up to two (2) years, may be applied for by sundry notice prior to expiration.

### **NOTIFICATION REQUIREMENTS**

Location Construction (Notify Environmental Scientist)	-	Forty-Eight (48) hours prior to construction of location and access roads.
Location Completion (Notify Environmental Scientist)	-	Prior to moving on the drilling rig.
Spud Notice (Notify Petroleum Engineer)	-	Twenty-Four (24) hours prior to spudding the well.
Casing String & Cementing (Notify Supv. Petroleum Tech.)	-	Twenty-Four (24) hours prior to running casing and cementing all casing strings to:blm_ut_vn_opreport@blm.gov.
BOP & Related Equipment Tests (Notify Supv. Petroleum Tech.)	-	Twenty-Four (24) hours prior to initiating pressure tests.
First Production Notice (Notify Petroleum Engineer)	-	Within Five (5) business days after new well begins or production resumes after well has been off production for more than ninety (90) days.

# SURFACE USE PROGRAM CONDITIONS OF APPROVAL (COAs)

- All new and replacement internal combustion gas field engines of less than or equal to 300 designrated horsepower must not emit more than 2 gms of NO<sub>x</sub> per horsepower-hour. This requirement does not apply to gas field engines of less than or equal to 40 design-rated horsepower.
- All and replacement internal combustion gas field engines of greater than 300 design rated horsepower must not emit more than 1.0 gms of NO<sub>x</sub> per horsepower-hour.
- If there is an active Gilsonite mining operation within 2 miles of the well location, operator shall notify the Gilsonite operator at least 48 hours prior to any blasting during construction.
- If paleontological materials are uncovered during construction, the operator is to immediately stop
  work and contact the Authorized Officer (AO). A determination will be made by the AO as to what
  mitigation may be necessary for the discovered paleontologic material before construction can
  continue.

### Wildlife

In accordance with the Record of Decision for the Castle Peak and Eightmile Flat Oil and Gas Expansion Project, Newfield Rocky Mountains Inc., the following COA's are required:

- WFM-1 On level or gently sloping ground (5 percent slope or less) Newfield will elevate surface
  pipelines (4 inches or greater in diameter) a minimum of 6 inches above the ground to allow
  passage of small animals beneath the pipe. This ground clearance will be achieved by placing the
  pipeline on blocks at intervals of 150 to 200 feet.
- WFM-4 Newfield will install noise reduction devices on all pump jacks to reduce intermittent noise to 45 dBA at 660 feet from the source.

### COA's derived from mitigating measures in the EA:

 The proposed project is within <u>mountain plover habitat</u>. In order to ensure habitat will be maintained, Newfield must use the following seed mix for all reclamation:

Common Name	Latin Name	Pure Live Seed (Lbs./Acre)	Limitations
Blue grama	Bouteloua gracilis	0.25	Over 10" precipitation
Squirreltail grass	Elymus elymoides	2.0	
Galleta grass	Pleuraphis jamesii	1.0	Utah seed only
Indian ricegrass	Achnatherum hymenoides	2.0	
Shadscale saltbush	Atriplex confertifolia	2.0	
Mat Saltbrush	Atriplex corrugata	2.0	Clay soils only
Gardner's saltbush	Atriplex gardneri	2.0	
Fringed sagebrush	Artemisia frigida	1.0	
Black sagebrush	Artemisia nova	0.25	Shallow soils only less than 24"
Scarlet globemallow	Sphaeralcea coccinea	0.25	

### For protection of T&E Fish if drawing water from the Green River

- For areas of fresh water collection, an infiltration gallery will be constructed in a Service approved location. An infiltration gallery is basically a pit or trench dug within the floodplain to a depth below the water table. Water is drawn from the pit rather than from the river directly. If this is not possible, limit pumping within the river to off-channel locations that do not connect to the river during high spring flows.
- If water cannot be drawn using the measures above and the pump head will be located in the river channel where larval fish are known to occur, the following measures apply:
  - Avoid pumping from low-flow or no-flow areas as these habitats tend to concentrate larval fished
  - Avoid pumping to the greatest extent possible, during that period of the year when larval fish may be present (see previous bullet); and
  - Avoid pumping, to the greatest extent possible, during the midnight hours (10:00 p.m. to 2:00 a.m.) as larval drift studies indicate that this is a period of greatest daily activity. Dusk is the preferred pumping time, as larval drift abundance is lowest during this time.
  - Screen all pump intakes with 3/32-inch mesh material.
- Report any fish impinged on the intake screen to the FWS office (801.975.3330) and the: Utah Division of Wildlife Resources

Northeastern Region 152 East 100 North Vernal, UT 84078 (435) 781-9453

### **Air Quality**

- 1. All internal combustion equipment will be kept in good working order.
- 2. Water or other approved dust suppressants will be used at construction sites and along roads, as determined appropriate by the Authorized Officer. Dust suppressant such as magnesium chloride or fresh water may be used, as needed, during the drilling phase.
- 3. Open burning of garbage or refuse will not occur at well sites or other facilities.
- 4. Drill rigs will be equipped with Tier II or better diesel engines.
- 5. Low bleed pneumatics will be installed on separator dump valves and other controllers.
- 6. During completion, not venting will occur, and flaring will be limited as much as possible. Production equipment and gathering lines will be installed as soon as possible.
- 7. Telemetry will be installed to remotely monitor and control production.
- 8. Signs will be installed on the access road, reducing speed to 25 MPH, during the drilling phase.
- 9. When feasible, two or more rigs (including drilling and completion rigs) will not be run simultaneously within 200 meters of each other. If two or more rigs must be run simultaneously within 200 meters of each other, then effective public health buffer zones out to 200 meters (m) from the nearest emission source will be implemented. Examples of an effective public health protection buffer zone include the demarcation of a public access exclusion zone by signage at intervals of every 250 feet that is visible from a distance of 125 feet during daylight hours, and a physical buffer such as active surveillance to ensure the property is not accessible by the public during drilling operations. Alternatively, the proponent may demonstrate compliance with the 1-hour NO2 National Ambient Air Quality Standards (NAAQS) with appropriate and accepted near-field

modeling. As part of this demonstration, the proponent may propose alternative mitigation that could include but is not limited to natural gas—fired drill rigs, installation of NOX controls, time/use restrictions, and/or drill rig spacing.

- 10. All new and replacement internal combustion gas field engines of less than or equal to 300 design-rated horse power must not emit more than 2 grams of NOx per horsepower-hour. This requirement does not apply to gas field engines of less than or equal to 40 design-rated horsepower-hour.
- 11. All new and replacement internal combustion gas field engines of greater than 300 design rated horsepower must not emit more than 1.0 grams of NOx per horsepower-hour.
- 12. Green completions will be used for all well completion activities where technically feasible.
- 13. Employ enhanced VOC emission controls with 95% control efficiency on production equipment having a potential to emit greater than 5 tons per year.

### Soils/Vegetation/Noxious Weeds

Appropriate erosion control and revegetation measures will be employed. In areas with unstable soils where seeding alone may not adequately control erosion, grading will be used to minimize slopes and rip rap or water bars will be installed on disturbed slopes. Erosion control efforts will be monitored by Newfield and, if necessary, modifications will be made to control erosion.

### S.O.P.s

- After cessation of drilling and completion operations, any visible or measurable layer of oil must be removed from the surface of the reserve pit and the pit kept free of oil.
- Pits must be free of oil and other liquid and solid wastes prior to filling. Pit liners must not be breached (cut) or filled (squeezed) while still containing fluids. The pit liner must be removed to the solids level or treated to prevent its reemergence to the surface or its interference with long-term successful revegetation.
- All operator employees and/or authorized personnel (sub-contractors) in the field will have approved applicable APD's, ROW, COAs permits/authorizations on their person(s) during all phases of construction.

### **Reclamation**

 Reclamation will be completed in accordance with the Newfield Exploration Company Castle Peak and Eight Mile Flat Reclamation Plan on file with the Vernal Field Office of the BLM and the Green River District Reclamation Guidelines (2011). Reclamation success will be determined in accordance with the 2011 Guidelines.

### Monitoring and Reporting

- The operator shall submit a Sundry Notice (Form 3160-5) to the BLM Authorized Officer (AO) that designates the proposed site-specific monitoring and reference sites chosen for the location. A description of the proposed sites shall be included, as well as a map showing the locations of the proposed sites.
- The operator shall submit a Sundry Notice (Form 3160-5) to the BLM Authorized Officer (AO) 3
  growing seasons after reclamation efforts have occurred evaluating the status of the reclaimed
  areas in order to determine whether the BLM standards set forth in the Green River District
  Reclamation Guidelines have been met (30% or greater basal cover).

Page 5 of 9 Well: L-9-9-16 6/29/2012

Prior to beginning new surface disturbance, the operator shall submit a Sundry Notice (Form 3160-5) to the BLM Authorized Officer (AO) providing the results of the noxious weed inventory described in the *Green River District Reclamation Guidelines* (2011). If weeds are found the report shall include 1) A GPS location recorded in North American Datum 1983; 2) species; 3) canopy cover or number of plants; 4) and size of infestation (estimate square feet or acres. Information shall be also documented in the reclamation report.

## DOWNHOLE PROGRAM CONDITIONS OF APPROVAL (COAs)

#### SITE SPECIFIC DOWNHOLE COAs:

- Production casing cement shall be brought up and into the surface.
- Surface casing cement shall be brought to surface.

All provisions outlined in Onshore Oil & Gas Order #2 Drilling Operations shall be strictly adhered to. The following items are emphasized:

### DRILLING/COMPLETION/PRODUCING OPERATING STANDARDS

- The spud date and time shall be reported orally to Vernal Field Office within 24 hours of spudding.
- Notify Vernal Field Office Supervisory Petroleum Engineering Technician at least 24 hours in advance of casing cementing operations and BOPE & casing pressure tests.
- All requirements listed in Onshore Order #2 III. E. Special Drilling Operations are applicable for air drilling of surface hole.
- Blowout prevention equipment (BOPE) shall remain in use until the well is completed or abandoned. Closing unit controls shall remain unobstructed and readily accessible at all times. Choke manifolds shall be located outside of the rig substructure.
- All BOPE components shall be inspected daily and those inspections shall be recorded in the daily
  drilling report. Components shall be operated and tested as required by Onshore Oil & Gas Order
  No. 2 to insure good mechanical working order. All BOPE pressure tests shall be performed by a
  test pump with a chart recorder and <u>NOT</u> by the rig pumps. Test shall be reported in the driller's
  log.
- BOP drills shall be initially conducted by each drilling crew within 24 hours of drilling out from under the surface casing and weekly thereafter as specified in Onshore Oil & Gas Order No. 2.
- Casing pressure tests are required before drilling out from under all casing strings set and cemented in place.
- No aggressive/fresh hard-banded drill pipe shall be used within casing.
- Cement baskets shall not be run on surface casing.
- The operator must report all shows of water or water-bearing sands to the BLM. If flowing water is
  encountered it must be sampled, analyzed, and a copy of the analyses submitted to the BLM Vernal
  Field Office.
- The operator must report encounters of all non oil & gas mineral resources (such as Gilsonite, tar sands, oil shale, trona, etc.) to the Vernal Field Office, in writing, within 5 working days of each encounter. Each report shall include the well name/number, well location, date and depth (from KB

or GL) of encounter, vertical footage of the encounter and, the name of the person making the report (along with a telephone number) should the BLM need to obtain additional information.

- A complete set of angular deviation and directional surveys of a directional well will be submitted to the Vernal BLM office engineer within 30 days of the completion of the well.
- While actively drilling, chronologic drilling progress reports shall be filed directly with the BLM,
   Vernal Field Office on a weekly basis in sundry, letter format or e-mail to the Petroleum Engineers until the well is completed.
- A cement bond log (CBL) will be run from the production casing shoe to the <u>top of cement</u> and shall be utilized to determine the bond quality for the production casing. Submit a field copy of the CBL to this office.
- Please submit an electronic copy of all other logs run on this well in LAS format to BLM\_UT\_VN\_Welllogs@BLM.gov. This submission will supersede the requirement for submittal of paper logs to the BLM.
- There shall be no deviation from the proposed drilling, completion, and/or workover program as approved. Safe drilling and operating practices must be observed. Any changes in operation must have prior approval from the BLM Vernal Field Office.

Page 8 of 9 Well: L-9-9-16 6/29/2012

### **OPERATING REQUIREMENT REMINDERS:**

- All wells, whether drilling, producing, suspended, or abandoned, shall be identified in accordance with 43 CFR 3162.6. There shall be a sign or marker with the name of the operator, lease serial number, well number, and surveyed description of the well.
- For information regarding production reporting, contact the Office of Natural Resources Revenue (ONRR) at www.ONRR.gov.
- Should the well be successfully completed for production, the BLM Vernal Field office must be
  notified when it is placed in a producing status. Such notification will be by written communication
  and must be received in this office by not later than the fifth business day following the date on
  which the well is placed on production. The notification shall provide, as a minimum, the following
  informational items:
  - o Operator name, address, and telephone number.
  - Well name and number.
  - Well location (¼¼, Sec., Twn, Rng, and P.M.).
  - Date well was placed in a producing status (date of first production for which royalty will be paid).
  - o The nature of the well's production, (i.e., crude oil, or crude oil and casing head gas, or natural gas and entrained liquid hydrocarbons).
  - o The Federal or Indian lease prefix and number on which the well is located; otherwise the non-Federal or non-Indian land category, i.e., State or private.
  - Unit agreement and/or participating area name and number, if applicable.
  - o Communitization agreement number, if applicable.
- Any venting or flaring of gas shall be done in accordance with Notice to Lessees (NTL) 4A and needs prior approval from the BLM Vernal Field Office.
- All undesirable events (fires, accidents, blowouts, spills, discharges) as specified in NTL 3A will be reported to the BLM, Vernal Field Office. Major events, as defined in NTL3A, shall be reported verbally within 24 hours, followed by a written report within 15 days. "Other than Major Events" will be reported in writing within 15 days. "Minor Events" will be reported on the Monthly Report of Operations and Production.
- Whether the well is completed as a dry hole or as a producer, "Well Completion and Recompletion Report and Log" (BLM Form 3160-4) shall be submitted not later than 30 days after completion of the well or after completion of operations being performed, in accordance with 43 CFR 3162.4-1. Two copies of all logs run, core descriptions, and all other surveys or data obtained and compiled during the drilling, workover, and/or completion operations, shall be filed on BLM Form 3160-4. Submit with the well completion report a geologic report including, at a minimum, formation tops, and a summary and conclusions. Also include deviation surveys, sample descriptions, strip logs,

core data, drill stem test data, and results of production tests if performed. Samples (cuttings, fluid, and/or gas) shall be submitted only when requested by the BLM. Vernal Field Office.

- All off-lease storage, off-lease measurement, or commingling on-lease or off-lease, shall have prior written approval from the BLM Vernal Field Office.
- Oil and gas meters shall be calibrated in place prior to any deliveries. The BLM Vernal Field Office
  Petroleum Engineers will be provided with a date and time for the initial meter calibration and all
  future meter proving schedules. A copy of the meter calibration reports shall be submitted to the
  BLM Vernal Field Office. All measurement facilities will conform to the API standards for liquid
  hydrocarbons and the AGA standards for natural gas measurement. All measurement points shall
  be identified as the point of sale or allocation for royalty purposes.
- A schematic facilities diagram as required by Onshore Oil & Gas Order No. 3 shall be submitted to
  the BLM Vernal Field Office within 30 days of installation or first production, whichever occurs first.
  All site security regulations as specified in Onshore Oil & Gas Order No. 3 shall be adhered to. All
  product lines entering and leaving hydrocarbon storage tanks will be effectively sealed in
  accordance with Onshore Oil & Gas Order No. 3.
- Any additional construction, reconstruction, or alterations of facilities, including roads, gathering
  lines, batteries, etc., which will result in the disturbance of new ground, shall require the filing of a
  suitable plan and need prior approval of the BLM Vernal Field Office. Emergency approval may be
  obtained orally, but such approval does not waive the written report requirement.
- No location shall be constructed or moved, no well shall be plugged, and no drilling or workover
  equipment shall be removed from a well to be placed in a suspended status without prior approval
  of the BLM Vernal Field Office. If operations are to be suspended for more than 30 days, prior
  approval of the BLM Vernal Field Office shall be obtained and notification given before resumption
  of operations.
- Pursuant to Onshore Oil & Gas Order No. 7, this is authorization for pit disposal of water produced from this well for a period of 90 days from the date of initial production. A permanent disposal method must be approved by this office and in operation prior to the end of this 90-day period. In order to meet this deadline, an application for the proposed permanent disposal method shall be submitted along with any necessary water analyses, as soon as possible, but no later than 45 days after the date of first production. Any method of disposal which has not been approved prior to the end of the authorized 90-day period will be considered as an Incident of Noncompliance and will be grounds for issuing a shut-in order until an acceptable manner for disposing of said water is provided and approved by this office.
- Unless the plugging is to take place immediately upon receipt of oral approval, the Field Office Petroleum Engineers must be notified at least 24 hours in advance of the plugging of the well, in order that a representative may witness plugging operations. If a well is suspended or abandoned, all pits must be fenced immediately until they are backfilled. The "Subsequent Report of Abandonment" (Form BLM 3160-5) must be submitted within 30 days after the actual plugging of the well bore, showing location of plugs, amount of cement in each, and amount of casing left in hole, and the current status of the surface restoration.

# BLM - Vernal Field Office - Notification Form

out below a casing string.  Date/Time 9/28/2012 4:00 AM PM   Casing - Please report time casing run starts, not cementing times.  Surface Casing Intermediate Casing Production Casing Liner Other  Date/Time 9/29/2012 10:00 AM PM   BOPE Initial BOPE test at surface casing point BOPE test at intermediate casing point 30 day BOPE test Other  Date/Time AM PM   Remarks	Operator Newfield Exploration Rig Name/# Ross 29 Submitted Bit Branden Arnold Phone Number 435-401-0223 Well Name/Number GMBU L-9-9-16 Qtr/Qtr SENE Section 9 Township 9S Range 16E Lease Serial Number UTU65207 API Number 43-013-51173
Casing − Please report time casing run starts, not cementing times.  Surface Casing Intermediate Casing Production Casing Liner Other  Date/Time 9/29/2012 10:00 AM  PM   BOPE Initial BOPE test at surface casing point BOPE test at intermediate casing point 30 day BOPE test Other  Date/Time AM PM   PM □	Spud Notice – Spud is the initial spudding of the well, not drilling out below a casing string.
Surface Casing Intermediate Casing Production Casing Liner Other  Date/Time 9/29/2012 10:00 AM PM PM  BOPE Initial BOPE test at surface casing point BOPE test at intermediate casing point 30 day BOPE test Other  Date/Time AM PM	Date/Time <u>9/28/2012</u> 4:00 AM ☐ PM ⊠
BOPE Initial BOPE test at surface casing point BOPE test at intermediate casing point 30 day BOPE test Other  Date/Time AM PM	times.  Surface Casing  Intermediate Casing  Production Casing  Liner
Initial BOPE test at surface casing point BOPE test at intermediate casing point 30 day BOPE test Other  Date/Time AM PM	Date/Time <u>9/29/2012</u> <u>10:00</u> AM M PM
	Initial BOPE test at surface casing point BOPE test at intermediate casing point 30 day BOPE test Other

FORM 3160-5 (August 2007)

# UNITED STATES DEPARTMENT OF THE INTERIOR

FORM APPROVED OMB No. 1004-0137 Expires: July 31,2010

1	BUREAU OF LAND MANA	GEMENT			5. Lease Serial 1	No.			
SUNDRY	NOTICES AND REPO	RTS ON WE	LLS		USA UTU-65207				
Do not use t	his form for proposals to ell. Use Form 3160-3 (AP	drill or to re-	enter an			ttee or Tribe Name.			
SUBMIT IN	TRIPLICATE - Other In	nstructions o	n page 2		7. If Unit or CA/	Agreement, Name and/or			
					GMBU				
1. Type of Well Gas Well	Other				8. Well Name ar	nd No			
2. Name of Operator	Other				GMBU L-9-9-1				
NEWFIELD PRODUCTION CO	OMPANY				9. API Well No.				
3a. Address Route 3 Box 3630		3b. Phone	(include are c	rode)	4301351173				
Myton, UT 84052		435.646.372	21		10. Field and Po	ol, or Exploratory Area			
4. Location of Well (Footage,	Sec., T., R., M., or Survey Descrip	otion)			GREATER MI				
					11. County or Pa	arish, State			
Section 9 T9S R16E SEN			DUCHESNE,						
12. CHECK	APPROPRIATE BOX(E	S) TO INIDIO	CATE NAT	TURE OF N	OTICE, OR O	THER DATA			
TYPE OF SUBMISSION			TYPE	OF ACTION	Į				
<b>—</b>	Acidize	Deepen		Producti	on (Start/Resume)	■ Water Shut-Off			
Notice of Intent	Alter Casing	Fracture 7	reat [	Reclama	tion	Well Integrity			
☑ Subsequent Report	Casing Repair	New Con	struction	Recomp	iete	☑ Other			
	Change Plans	Plug & A	bandon		rily Abandon	Spud Notice			
Final Abandonment	Convert to Injector	Plug Back	(	Water D	isposal				
yield. Returned 5 barrels	ement with 160 sks of class is cement to pit. WOC.								
I hereby certify that the foregoing i correct (Printed/ Typed)	s true and	Title							
Branden Arnold									
Signature	- a l	Date	100/0010						
Sunder Fr	THIS SPACE FO		/02/2012 L. OR STA	ATE OFFI	CE USE				
	IIISSIACEI								
Approved by  Conditions of approval, if any, are attaccertify that the applicant holds legal or of	equitable title to those rights in the sub	warrant or sject lease	Title Office			Date			
which would entitle the applicant to con Title 18 U.S.C. Section 1001 and Title 4 States any false, fictitious and fraudulen	13 U.S.C. Section 1212, make it a crin	ne for any person k	nowingly and w	illfully to make	CENEDTO	agency of the United			
States any false, fictitious and fraudulen	it statements or representations as to a	ny matter within its	s jurisaiction	KE					

(Instructions on page 2)

OCT 0 5 2012

# Casing / Liner Detail

Well	GMBU L	-9-9-16							
Prospect	Monume	nt Butte	and the same of the same	Palarin alian ( Minnesot III adam alian ali	······································		ni oʻrbaninda dhini i niga nagarka qaqad		
Foreman		ameninka ayay alam di di dagan da ay ay (inagan garapa sa ay	articonductive and .	n, ative difficult finish i dine an'efferent je	<del>al anno e que establica (incolonies anno establica anno e</del>	k kamadandarya ar 1 merupak hajiya ar Bastina sabba	Makelung Berkeler of related to 200 majority and		
Run Date:									
Odnika a Tama					inggagyayyaya Mandii adadan yabidi, ayan		All the boundaries and a series of the serie		
String Type	Surface,	8.625", 24#,	J-55,	STC (Ge	eneric)	e Manada kalan sasan sasan saran sasan saran	- and former companies to be the companies of the compani		
				- Deta	il From Top	To Bot	tom -		
Depth	Length	JTS				Descriptio	on	OD .	ID
318.72			10' KE	}					
10.00	1.42		Wellhe	ead					
11.42	263.15	6	8 5/8 (	Casing	8.625				
274.57	44.15	1	Shoe .	Joint	8.625				
318.72	0.90		Guide	Shoe	8.625				
319.62			-						
					Cement D	etail			
ement Compa									
the second second		ght (ppg) Yiel 15.8 1.1	***	lume (ft³) 187.2	Class G+2%ko		escription - Slurry Class and Additive	<b>S</b>	
tab-In-Job?		No		7			Cement To Surface?	Yes	2
HT:		0		1			Est. Top of Cement:	0	
itial Circulation	Pressure:						Plugs Bumped?	Yes	3
itial Circulation							Pressure Plugs Bumped:	400	)
inal Circulation I						No			
inal Circulation I				1			Casing Stuck On / Off Bottom?	No	
isplacement Flu		Seawate	r				Casing Reciprocated?	No	
isplacement Ra							Casing Rotated?	No	
isplacement Vol	iume:	18.5					CIP:	12:0	5
ud Returns:	And Dines			-			Casing Wt Prior To Cement:		
entralizer Type			A-1 - 5 11	l			Casing Weight Set On Slips:		····



OPERATOR: NEWFIELD PRODUCTION COMPANY ADDRESS RT. 3 BOX 3630 MYTON, UT 84052

OPERATOR ACCT NO

N2695

ACTION COOK	CURRENT ENTITY NO	FULLTA NO	API NUMBI R	WELL NAME	- 00	1 SC VV	ELL LOCA	TION RG	COUNTY	SPUD DATE	FFFECTIVE DAIL
В	99999	17400	4301350880	GMBU 8-14T-9-16	SENE	14	98	16E	DUCHESNE	9/13/2012	10/24112
WELL 1 O	DAMENIS DRRV										-
ACTION CODE	CURRENT ENTITY NO	ENFITY NO	AFI NUMBER	WELL NAME	50	8C AN	ELL LOCA	ION IIG	CDGP-TY	SPUD DATE	EFFECTIVL DATE
А	99999	18753	4301351390	MORRILL 4-23-3-2WH	NWNW	23	38	2W	DUCHESNE	9/11/2012	10(24/12
G	RRV		***************************************	THE MAIN PROPERTY OF THE ACCOUNTY OF THE PROPERTY OF THE PROPE	ALL DE LEGISLATION OF THE PARTY				(!^	HEIDEN	
ACTION B	CURRENI ENTITY NO	NEW ENTITY NO	AH NUMBER	WI-CL NAME	00	wi Isc	ILLOCA!	ION RG	COUNTY	DATE DATE	* I FEETIVE
В	99999	17400	4301350821	GMBU Y-35-8-17	NENE	3	93	1	DUCHESNE	9/26/2012	10/24/10
C	JRRV B		9S-17E at the surface of	of the whole, and 8S-17E at the bottom of	the whole			Leterinia esperie	de anne incrementation de la company de la c		
ACTION LJQŁ	CURRENT ENTITY NO	(NUIAVO VEA	API NUMBER	WELF NAME	- 69	SC WE	IL LOCAL	ION RG	COUNTY	SPUD DATE	EFFECT:VE DATE
В	99999	17400	4301351174	GMBU O-10-9-16	SENE	9	98	16E	DUCHESNE	9/29/2012	10124/12
WELL 1 CC	DMMENTS RV SI	o hu	SW								
ACHON CODE	CURRENT ENTITY NO	NEW ENTRY NO.	API NUMBER	WELL NAME	UQ	SC.	IL LOCAT	ION RG	COUNTY	SPUD DATI	EF+EC¹IVL DAFF
В	99999	17400	4301351173	GMBU L-9-9-16	SENE	9	98	16E	DUCHESNE	9/18/2012	10124112
G	RRV E	SHL: r	iwse_				******	***************************************			
ACTION 8	CURRENT ENTITY NO	EMHHANO NEI/	AFTNUMBER	WELL NAME	uo .	₩£	LL LÖGAT	ION RG	COUNTY	SPUD DATE	EFFECTIVE
Α	99999	18754	4301351412	LUSTY 1-11-3-3W	NENE	11	38	3W	DUCHESNE	9/28/2012	10/24/16
U	DSTC r	rene				A			<u></u>		
ACTION CODE	CURRENT FNTITY NO	NEW ENTITY NO	API NUMBER	WHIL NAME	GO	WE SC	LL LOCAT	ON RG	COUNTY	SFVD DATE	EFFEGTIVÊ DAFE
В	99999	17400	4301351249	GMBU E-16-9-17	SESE	છ	98	17E	DUCHESNE	10/1/2012	10/24/12
B- A	CRRV stab rah new eithly for new we the stab rah wall to extend the wall to extend the stab rah wall from one extended	ii (siny'e wali only) group or unit well)	le nunu	RECEIVE:	L)				Associative Signature	Blusin	Tasha Robison
D - R	ther (explain in comments sec ther (explain in comments sec	aup A go a uem euirlà.	- ig vnary	OCT 12 201	2				Production Clerk		10/03/12
				JO1							

Sundry Number: 32082 API Well Number: 43013511730000

	STATE OF UTAH		FORM 9
	DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING	G	5.LEASE DESIGNATION AND SERIAL NUMBER: UTU-65207
SUNDR	Y NOTICES AND REPORTS ON	WELLS	6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
Do not use this form for pro current bottom-hole depth, I FOR PERMIT TO DRILL form	posals to drill new wells, significantly dee reenter plugged wells, or to drill horizontal n for such proposals.	pen existing wells below laterals. Use APPLICATION	7.UNIT or CA AGREEMENT NAME: GMBU (GRRV)
1. TYPE OF WELL Oil Well			8. WELL NAME and NUMBER: GMBU L-9-9-16
2. NAME OF OPERATOR: NEWFIELD PRODUCTION CO	DMPANY		9. API NUMBER: 43013511730000
3. ADDRESS OF OPERATOR: Rt 3 Box 3630 , Myton, UT	ONE NUMBER: xt	9. FIELD and POOL or WILDCAT: MONUMENT BUTTE	
4. LOCATION OF WELL FOOTAGES AT SURFACE: 1817 FNL 0669 FEL			COUNTY: DUCHESNE
QTR/QTR, SECTION, TOWNSH Qtr/Qtr: SENE Section: 0	S	STATE: UTAH	
11. CHECI	K APPROPRIATE BOXES TO INDICATE N	NATURE OF NOTICE, REPOR	RT, OR OTHER DATA
TYPE OF SUBMISSION		TYPE OF ACTION	
	CHANGE TO PREVIOUS PLANS  CHANGE WELL STATUS  DEEPEN  OPERATOR CHANGE  PRODUCTION START OR RESUME  REPERFORATE CURRENT FORMATION  TUBING REPAIR  WATER SHUTOFF  WILDCAT WELL DETERMINATION  COMPLETED OPERATIONS. Clearly show all points of the production on 1 and 1 a		CHANGE WELL NAME  CONVERT WELL TYPE  NEW CONSTRUCTION  PLUG BACK  RECOMPLETE DIFFERENT FORMATION  TEMPORARY ABANDON  WATER DISPOSAL  APPD EXTENSION  OTHER:  DEPths, volumes, etc.  Accepted by the Utah Division of Oil, Gas and Mining  FOR RECORD ONLY  November 15, 2012
NAME (PLEASE PRINT)	PHONE NUMBER	TITLE	
Jennifer Peatross SIGNATURE	435 646-4885	Production Technician  DATE	
N/A		11/14/2012	

Form 3160-4 (August 2007)

### **UNITED STATES** DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT

FORM APPROVED OMB NO. 1004-0137 Expires: July 31, 2010

VA/ET I	COMPLETION	OR RECO	MPI FTION	REPORT	ANDIOG
VVELL	CONFLETION	UR REGI			AILD LOO

	W	ELL (	COMP	LETIC	ON OR F	RECOMPLE	TIC	ON REF	PORT	AND I	.og				ease Ser J-6520			
la. Type of b. Type of	Well		Dil Well		Gas Well	Dry Deepen	Ot PI	ther	□ Diff	f Resyr.				6. If	Indian,	Allottee or	ribe Name	=
o. Type of	Completion		other:		WOIK OVE					., 1.2011	,				nit or C		t Name and No.	
2. Name of NEWFIEL	Operator D EXPLO	RATIO	N COM	IPANY										8. L		me and Well	No.	_
3. Address	1401 17TH								Phone 1		lude ar	ea code	·)	9. A	FI Well 013-51	No.		_
4. Location						lance with Feder	ral re			<u> </u>				10. 1	Field an	d Pool or Ex		_
At surfac	e 40471 E	NII 0 0	en' EEI	(QE/N	E/ 9EC (	9, T9S, R16E	/I IT	いたらつので	`					11 :	Sec T	NT BUTTE R., M., on B	lock and	_
ra surrae	~ 1017 F	INL & C	OS FEI	_ (SE/IV	E) 3EU. :	9, 190, KIUE	(01	0-03207	,					5	Survey o	or Area SEC.	9, T9S, R16E	
						3' FEL (SE/NE								12.		or Parish	13. State	_
At total de	ent 2464	FSL 8	k 1541'	FEL (N	W/SE) SI	EC. 9, T9S, R	16E	(UTU-40	<sub>0894)</sub> B	HL b	y D	OGN	л на	3M) DUO	CHESI	1E	UT	
14. Date Sp	udded		15	. Date T 0/10/20	'.D. Reache	d		16. D	ate Comp	pleted 1	1/06/2	2012		17. 1		ns (DF, RK 5732' KB	3, RT, GL)*	
09/28/201 18. Total D	epth: MD		9'	0/10/20		ug Back T.D.:		6279'					idge Pl	ug Set:	MD			_
21. Type E		D 616 her Mecl		ogs Run	(Submit co	py of each)	TVI	26116		_	22. V	Vas wel	cored?	<b>✓</b> N		Yes (Submit		-
						EUTRON,GR,	CAL	LIPER, C	MT BO	ND		Vas DST Direction				Yes (Submit	report) copy)	_
23. Casing	and Liner I				s set in wei		_	Stage Ce	menter	l No.	of Sks	. &.	Slu	rry Vol.		T	A (D.11-1	
Hole Size	Size/Gr		Wt. (#/ft	<del></del>	op (MD)	Bottom (MD	))	Dep		Type	of Cer	ment		BBL)	Cem	ent Top*	Amount Pulled	_
12-1/4" 7-5/8"	8-5/8" J 5-1/2" J		24# 15.5#	0		320' 6323'	$\dashv$	· · · · · · · · · · · · · · · · · · ·		160 C					556'			
1-5/6	3-1/2 3	-95	10.0#	+-		10020	$\dashv$			470 5								
							$\dashv$											
24. Tubing	Record	L		_l		1	_1			l		i						
Size	Depth	Set (MI		cker Dep		Size	4	Depth Set	(MD)	Packer	Depth (	(MID)		Size	Dep	th Set (MD)	Packer Depth (MD)	<u>)                                    </u>
2-7/8" 25. Produci			S'   IA (	@ 6038		<del>.</del>	2	26. Per	foration l	Record								_
	Formatio	n			op 4D	Bottom 6068' MD	$\dashv$		orated In	terval		0.34"	Size No. Holes		Ioles		Perf. Status	
A) Green I B)	River			4308' N	טוע	9098, MID	╬	4308-606	OR, MID			0.34		63				_
<u>c)</u>							7								_			
D)														9		_		
27. Acid, F	racture, Tre Depth Inter				, etc.					Amount	and Ty	pe of M	faterial					
4308-6068				Frac w/	225965#	s 20/40 white	san	ıd; 1655 l	bbls Lig	htning	17 flu	id; 5 st	ages.					
									_									_
																<del> </del>		
28. Product					10.11	To	h		10:1.0		- In-		ln.	ndustion N	fothod			
Date First Produced	Test Date	Hours Tested	Test Proc		Oil BBL		Wat BBI		Oil Grav Corr. Al		Ga Gr	s avity		oduction M				
10/29/12	11/8/12	24		<b>→</b>	102	33	187	7						-1/2" x 1-3	3/4" x 2	20' x 21' x 2 	4' RHAC Pump	
Choke Size	Tbg. Press. Flwg.	Csg. Press.	24 I Rate		Oil BBL	Gas MCF	Wat BBI		Gas/Oil Ratio		We	ell Statu	IS					
Size	SI	11035.	- Itali	_	BBB			-			PI	RODU	CING					
28a. Produc	tion - Interv	/al B	l				<u> </u>		<u> </u>			-						
Date First Produced	Test Date	Hours Tested	Test		Oil BBL		Wat BBI		Oil Grav Corr. Al		Ga Gr:	s avity	Pr	oduction M	lethod			
riouucea		Losicu			720		J.,			-						DEAR	1.000	
	Tbg, Press,		24 I		Oil		Wat		Gas/Oil		We	ell Statu	ıs			RECE	VED	
Size	Flwg. SI	Press.	Rate	•	BBL	MCF	BBI		Ratio							FEB 1	5 2013	
		<u> </u>			<u></u>		<u> </u>		<u> </u>							1	- #414	

28b. Prod	uction - Inte	erval C						<del> </del>				
Date First Produced		Hours Tested	Test Production	Oil BBL	Gas MCF	Water BBL	Oil Gravity Corr. API	Gas Gravity	Production Method			
Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas/Oil Ratio	Well Status				
28c. Produ	l ction - Inte	rval D		<u> </u>								
Date First	Test Date	Hours	Test	Oil	Gas	Water	Oil Gravity	Gas	Production Method	·		
Produced		Tested	Production	BBL	MCF	BBL	Corr. API	Gravity				
Size	Tbg. Press. Flwg. SI	Csg. Press.	24 Hr. Rate	Oil BBL	Gas MCF	Water BBL	Gas/Oil Ratio	Well Status	Well Status			
9. Dispos	ition of Gas	(Solid, us	sed for fuel, ver	nted, etc.)		l						
SOLD AND (	JSED FOR F	UEL										
0. Summa	ary of Poro	us Zones	(Include Aquit	fers):				31. Format	ion (Log) Markers			
	g depth inte					intervals and all ng and shut-in p	drill-stem tests, pressures and	GEOLOG	ICAL MARKERS			
Form	etion	Тор	Bottom		Dasc	criptions, Conte	nta ete		Nome	Тор		
rom	ation	10р	Bottom		Desc	ripuons, Come	nts, etc.		Name	Meas. Depth		
								GARDEN GU GARDEN GU		3794' 4014'		
								GARDEN GU POINT 3 MR		4131' 4388'		
								X MRKR Y MRKR		4667' 4703'		
								DOUGLAS C BI-CARBONA		4824' 5076'		
								B LIMESTON CASTLE PEA		5202' 5693'		
								BASAL CARE WASATCH	SONATE	6152' 6278'		
			olugging proce									
		•		·								
Indicate	which ite-	hove be-	an attach - 11	nloging -	aback in the	appropriate box						
			-									
			I full set req'd.)			Geologic Report	DST R		✓ Directional Survey			
☐ Sundry	Notice for p	olugging a	nd cement verif	ication		Core Analysis	✓ Other:	Daily Complet	ion Report			
					nation is comp	olete and correc	t as determined fro	m all available re	cords (see attached instruction	ns)*		
Nam	e (please pi	int) Jeni	nifer Peatros	s			Title Production	n Technician				
Sign	ature	Ye	WY	US,		·-	Date 01/02/201	3				
le 18 U.S.(	C. Section 1	001 and 7	Citle 43 U.S.C.	Section 1	212, make it	a crime for any ter within its ju	person knowingly	and willfully to 1	nake to any department or ag	ency of the United States any		
ontinued or		-								(Form 3160-4, page		



# **NEWFIELD EXPLORATION**

USGS Myton SW (UT) SECTION 9 T9S, R16E L-9-9-16

Wellbore #1

Design: Actual

# **Standard Survey Report**

14 January, 2013





Survey Report



Company: **NEWFIELD EXPLORATION** Project: USGS Myton SW (UT)

SECTION 9 T9S, R16E

L-9-9-16 Well: Wellbore #1 Wellbore: Actual Design:

Local Co-ordinate Reference:

Well L-9-9-16 TVD Reference:

MD Reference: North Reference:

Survey Calculation Method:

Database:

L-9-9-16 @ 5734.0ft (NDSI SS #1)

L-9-9-16 @ 5734.0ft (NDSI SS #1)

True

Minimum Curvature

EDM 2003.21 Single User Db

USGS Myton SW (UT), DUCHESNE COUNTY, UT, USA Project

Map System: Geo Datum:

Site:

US State Plane 1983

Map Zone:

North American Datum 1983

Utah Central Zone

System Datum:

Mean Sea Level

Site

From:

Well

SECTION 9 T9S, R16E, SEC 9 T 9S, R16E

Site Position:

Map

Northing:

7,188,127.00 ft

Latitude:

40° 2' 42.503 N

Position Uncertainty:

0.0 ft

Easting: Slot Radius: 2,025,493.00 ft

Longitude:

110° 7' 27.974 W

**Grid Convergence:** 

0.88°

L-9-9-16, SHL LAT:40 02 51.38 LONG: -110 07 02.05

Well Position +N/-S

+E/-W

0.0 ft

Northing:

7,189,056.19 ft

Latitude:

40° 2' 51.380 N

**Position Uncertainty** 

0.0 ft 0.0 ft

Easting: Wellhead Elevation: 2,027,494.87 ft 5,734.0 ft

Longitude: Ground Level: 110° 7' 2.050 W

5,722.0 ft

Wellhore Well	hore #1				
Magnetics N	lodel Name	Sample Date [	Declination	Dip Angle F	ield Strength
	IGRF2010	6/25/2011	11.33	65.79	52,260

Design	Actual					
Audit Notes:						
Version:	1.0	Phase:	ACTUAL	Tie On Depth:	0.0	
Vertical Section	<b>1.</b> 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1.	Depth From (TVD)	+N/-S	+E/-W	Direction	
		(ft)	(ft)	(ft)	(°)	
		0.0	0.0	0.0	220.75	

Survey Program Date 1/14/2013 From To (ft) (ft) Survey (Wellbore)	Tool Name	Description
375.0 6,333.0 Survey #1 (Wellbore #	) MWD	MWD - Standard

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ff)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00
375.0	1.00	86.10	375.0	0.2	3.3	-2.3	0.27	0.27	0.00
406.0	0.80	108.00	406.0	0.2	3.7	-2.6	1.27	-0.65	70.65
435.0	0.48	144.90	435.0	0.0	4.0	-2.6	1.75	-1.10	127.24
466.0	0.75	206.20	466.0	-0.3	4.0	-2.4	2.16	0.87	197.74
497.0	1,00	221.00	497.0	-0.7	3.7	-1.9	1.08	0.81	47.74
527.0	1.50	217.90	527.0	-1.2	3.3	-1.3	1.68	1.67	-10.33
558.0	2.10	225.50	557.9	-1.9	2.7	-0.3	2.08	1.94	24.52
588.0	2.60	227,20	587.9	-2.7	1.8	0.9	1.68	1.67	5.67
618.0	3.20	225.90	617.9	-3.8	0.7	2.4	2.01	2.00	-4.33
649.0	3.50	214.90	648.8	-5.2	-0.5	4.2	2.28	0.97	-35.48
680.0	3.60	214.90	679.8	-6.7	-1.6	6.1	0.32	0.32	0.00
710,0	3.80	217.40	709.7	-8.3	-2.7	8.1	0.86	0.67	8.33



Survey Report



Company:

NEWFIELD EXPLORATION

Project: Site:

USGS Myton SW (UT)

Well: Wellbore:

SECTION 9 T9S, R16E L-9-9-16

Weilbore #1 Design: Actual

Local Co-ordinate Reference:

TVD Reference:

MD Reference: North Reference:

Survey Calculation Method:

Database:

Well L-9-9-16

L-9-9-16 @ 5734.0ft (NDSI SS #1)

L-9-9-16 @ 5734.0ft (NDSI SS #1)

True

Minimum Curvature

EDM 2003.21 Single User Db

Measured			Vertical			Vertical	Dogleg	Build	Turn Rate
Depth (ft)	Inclination (°)	Azimuth (°)	Depth (ft)	+N/-S (ft)	+E/-W (ft)	Section (ft)	Rate (°/100ft)	Rate (°/100ft)	(°/100ft)
Prima Makataka ini	and the same of the same of	216.70	740.6	-10.1	-4.1	10.3	1.94	1.94	-2.26
741.0 771.0	4.40 5.00	219.50	740.5	-12.0	- <del></del> .1 -5.6	12.7	2.14	2.00	9.33
802.0	5.20	225.10	801.4	-14.0	-7.5	15.5	1.73	0.65	18.06
832.0	5.60	233.00	831.3	-15.9	-9.6	18.3	2.81	1.33	26.33
862.0	6.40	235.00	861.1	-17.7	-12.1	21.3	2.76	2.67	6.67
893.0	7.10	239.80	891.9	-19.7	-15.2 -18.6	24.8 28.5	2.90 2.43	2.26 2.33	15.48 5.33
923.0	7.80	241.40	921.6	-21.6		20.5	2.43		
953.0	8.20	239.90	951.3	-23.6	-22.2	32.4	1.50	1.33	-5.00
984.0	9.00	239.70	982.0	-26.0	-26.2	36.8	2.58	2.58	-0.65
1,014.0	9.40	237.30	1,011.6	-28.5	-30.3	41.3	1.85	1.33	-8.00
1,045.0	9.80	237.60	1,042.2	-31.2	-34.7	46.3	1.30	1.29	0.97
1,075.0	10.60	235.80	1,071.7	-34.2	-39.1	51.4	2.87	2.67	-6.00
1,106.0	11.40	232.30	1,102.1	-37.6	-43.9	57.2	3.36	2.58	-11.29
1,136.0	11.90	231.20	1,131.5	-41.4	-48.6	63.1	1.82	1.67	-3,67
1,180.0	12.20	225.30	1,174.6	-47.5	-55.5	72.2	2.88	0.68	-13.41
1,226.0	12.70	221.90	1,219.5	-54.7	-62.3	82.1	1.93	1.09	-7.39
1,272.0	12.80	221.20	1,264.3	-62.3	-69.1	92.3	0.40	0.22	-1.52
				-69.9	-75.8	102.4	0.34	0.00	1.52
1,318.0	12.80	221.90	1,309.2	-69.9 -77.2	-75.6 -82.1	112.1	1.66	0.70	-6.74
1,361.0	13.10	219.00	1,351.1	-77.2 -85.6	-82.1 -88.8	122.8	1.79	1.74	-1.74
1,407.0	13.90	218.20	1,395.8	-94.3	-95.2	133.6	2.43	1.36	-8.18
1,451.0	14.50	214.60	1,438.5 1,481.1	-103.6	-95.2 -101.4	144.6	1.10	0.68	-3.41
1,495.0	14.80	213.10	1,401.1						
1,539.0	14.70	214.30	1,523.6	-112.9	-107.6	155.7	0.73	-0.23	2.73
1,585.0	14.80	213.80	1,568.1	-122.6	-114.1	167.4	0.35	0.22	-1.09
1,631.0	15.00	214.10	1,612.5	-132.4	-120.7	179.1	0.47	0.43	0.65
1,675.0	15.30	214.60	1,655.0	-141.9	-127.2	190.5	0.74	0.68	1.14
1,721.0	15.00	215.80	1,699.4	-151.7	-134.1	202.5	0.94	-0.65	2.61
1,765.0	14.50	218.50	1,742.0	-160.6	-140.9	213.7	1.93	-1.14	6.14
1,808.0	14.70	218.90	1,783.6	-169.1	-147.7	224.5	0.52	0.47	0.93
1,854.0	14.40	218.50	1,828.1	-178.1	-154.9	236.1	0.69	-0.65	-0.87
1,898.0	13.70	219.70	1,870.8	-186.4	-161.6	246.7	1.72	-1.59	2.73
1,942.0	12.90	219.50	1,913.6	-194.2	-168.1	256.9	1.82	-1.82	-0.45
					4740	267.1	1.09	-0.22	4.78
1,988.0	12.80	221.70	1,958.5	-202.0	-174.8 -181.7	277.1	1.84	0.44	8.00
2,033.0	13.00	225.30 225.30	2,002.3 2,047.1	-209.3 -216.6	-181.7 -189.1	287.6	0.87	0.44	0.00
2,079.0	13.40 13.80	225.30 222.10	2,047.1	-216.6 -224.5	-109.1	298.4	1.85	0.87	-6.96
2,125.0 2,169.0	13.80	219.30	2,091.6	-224.5 -232.6	-203.6	309.1	2.22	1.59	-6,36
2,215.0	15.10	220.80	2,178.9	-241.6	-211.2	320.9	1.55	1.30	3.26
2,260.0	15.40	220.70	2,222.4	-250.6	-218.9	332.7	0.67	0.67	-0.22
2,304.0	15.50	219.50	2,264.8	-259.6	-226.4	344.4	0.76	0.23	-2.73
2,350.0	15.80	218.80	2,309.1	-269.2	-234.3	356.8	0.77	0.65	-1.52
2,396.0	15.60	218.50	2,353.4	-278.9	-242.1	369.3	0.47	-0.43	-0.65
2,442.0	15.20	219.30	2,397.7	-288.4	-249.7	381.5	0.98	-0.87	1.74
2,488.0	15.20	217.40	2,442.1	-297.9	-257.2	393.5	1.08	0.00	-4.13
2,531.0	15.20	217.10	2,483.6	-306.8	-264.0	404.8	0.18	0.00	-0.70
2,577.0	15.20	217.60	2,528.0	-316.4	-271.3	416.8	0.28	0.00	1.09
2,623.0	14.80	218.30	2,572.4	-325.8	-278.7	428.7	0.95	-0.87	1.52
					-285.9	440.5	0.67	0.00	-2.61
2,669.0	14.80	217.10	2,616.9	-335.1 344.1	-285.9 -292.6	440.5 451.7	0.87	0.00	-0.23
2,713.0	14.90	217.00	2,659.4	-344.1			1.20	0.23	4.67
2,758.0	14.90	219.10	2,702.9	-353.2 -361.8	-299.8 -307.1	463.3 474.5	1.20	-0.23	7.50
2,802.0	14.80	222.40	2,745.4	-361.8 -370.6		474.5 486.5	1.09	1.09	-0.43
2,848.0	15.30	222.20	2,789.9	-370.6	-315.2				
2,894.0	15.70	223.80	2,834.2	-379.6	-323.6	498.8	1.27	0.87	3.48
2,938.0	16.00	223.30	2,876.5	-388.3	-331.8	510.8	0.75	88.0	-1.14



Survey Report



Company: NEWFIELD EXPLORATION
Project: USGS Myton SW (UT)

Site: SECTION 9 T9S, R16E

Welli L-9-9-16
Wellbore: Wellbore #1
Design: Actual

Local Co-ordinate Reference:

TVD Reference: MD Reference: North Reference:

Survey Calculation Method:

Database:

Well L-9-9-16

L-9-9-16 @ 5734.0ft (NDSI SS #1)

L-9-9-16 @ 5734.0ft (NDSI SS #1)

True

Minimum Curvature

EDM 2003.21 Single User Db

esign.	promised the state of the state of	manus a transaction day of the	and the second s		News Act		an an ann an	a garagida, indra barnin barna barnin 1942 - Lando John Maria Peling	المحتمد مستعمل فيطا فالمدائد وتدعية عربي العام المائد المحتم المركب أمارة والأركا
urvėy									
Measured			Vertical			Vertical	Dogleg	Build Rate	Turn Rate
Depth (ft)	Inclination (°)	Azimuth (°)	Depth (ft)	+N/-S (ft)	+E/-W (ft)	Section (ft)	Rate (°/100ft)	(°/100ft)	(°/100ft)
2,984.0	15.60	219.70	2,920.8	-397.7	-340.1	523.3	2.30	-0.87	-7.83
3,028.0	15.10	220.50	2,963.2	-406.6	-347.6	534.9	1.23	-1.14	1.82
3,072.0	15.00	220.20	3,005.7	-415.3	-355.0	546.4	0.29	-0.23	-0.68
3,115.0	15.30	218.70	3,047.2	-424.0	-362.2	557.6	1.15	0.70	-3.49
3,161.0	14.90	218.90	3,091.6	-433.3	-369.7	569.6	0.88	-0.87	0.43
3,205.0	14.60	217.00	3,134.2	-442.1	-376.6	580.8	1.29	-0.68	-4.32
3,249.0	14.70	216.60	3,176.7	-451.0	-383.2	591.9	0.32	0.23	-0.91
3,293.0	14.70	217.00	3,219.3	-460.0	-389.9	603.0	0.23	0.00	0.91
3,337.0	14.80	218.80	3,261.8	-468.8	-396.8	614.2	1.07	0.23	4.09
3,381.0	14.60	218.80	3,304.4	-477.5	-403.8	625.3	0.45	-0.45	0.00
3,426.0	14.60	218.80	3,347.9	-486.4	-410.9	636.7	0.00	0.00	0.00
3,472.0	14.50	218.70	3,392.5	-495.4	-418.1	648.2	0.22	-0.22	-0.22
3,518.0	14.20	219.90	3,437.0	-504.2	-425.4	659.6	0.92	-0.65	2.61
	14.40	219.30	3,479.7	-512.6	-432.3	670.5	0.57	0.45	-1.36
3,562.0	14.40	220.80	3,524.2	-512.6 -521.4	-432.3 -439.7	682.0	0.92	0.43	3.26
3,608.0			3,524.2 3,567.8	-530.0	-439.7 -447.0	693.3	0.50	-0.22	-1.78
3,653.0	14.50	220.00	3,610.4	-538.4	-454.1	704.3	0.23	-0.23	-0.23
3,697.0 3,743.0	14.40 14.00	219.90 218.80	3,610.4 3,655.0	-536.4 -547.1	-454.1 -461.2	704.3 715.6	1.05	-0.23	-2.39
						726.1	0.81	-0.68	1.82
3,787.0	13.70	219.60	3,697.7	-555.3	-467.9			-1.09	-1.30
3,833.0	13.20	219.00	3,742.4	-563.6	-474.7	736.8	1.13		2.44
3,878.0	13.00	220.10	3,786.3	-571.4	-481.2	747.0	0.71	-0.44	
3,922.0	13.50	220.00	3,829.1	-579.2	-487.7	757.1	1.14	1.14	-0.23
3,966.0	13.90	221.30	3,871.8	-587.1	-494.4	767.5	1.15	0.91	2.95
4,012.0	14.28	221.80	3,916.5	-595.4	-501.9	778.7	0.87	0.83	1.09
4,058.0	14.15	223.60	3,961.0	-603.7	-509.5	790.0	1.00	-0.28	3.91
4,103.0	14.15	221.60	4,004.7	-611.8	-517.0	801.0	1.09	0.00	-4.44
4,149.0	14.80	221.00	4,049.2	-620.5	-524.6	812.5	1.45	1.41	-1.30
4,193.0	14.37	223.10	4,091.8	-628.7	-532.0	823.5	1.55	-0.98	4.77
4,237.0	14.30	222.10	4,134.4	-636.7	-539.4	834.4	0.58	-0.16	-2.27
4,283.0	14.10	220.00	4,179.0	-645.2	-546.8	845.7	1.20	-0.43	-4.57
4,328.0	14.28	218.60	4,222.7	-653.8 ←	-553.7	856.7	0.86	0.40	-3.11
4,374.0	14.00	218.40	4,267.3	-662.6	-560.7	868.0	0.62	-0.61	-0.43
4,418.0	14.10	219.00	4,309.9	-670.9	-567.4	878.6	0.40	0.23	1.36
4,462.0	14.10	221.00	4,352.6	-679.1	-574.3	889.4	1.11	0.00	4.55
4,508.0	14.20	222.10	4,397.2	-687.5	-581.8	900.6	0.62	0.22	2.39
4,551.0	14.20	221.30	4,438.9	-695.4	-588.8	911.1	0.46	0.00	-1.86
4,595.0	14.10	220.00	4,481.6	-703.6	-595.8	921.9	0.76	-0.23	<i>-</i> 2.95
4,641.0	13.80	221.20	4,526.2	-712.0	-603.0	933.0	0.91	-0.65	2.61
4,685.0	13.90	220.20	4,568.9	-720.0	-609.9	943.5	0.59	0.23	-2.27
	14.00	219.00	4,611.6	-728.1	-616.6	954.1	0.70	0.23	-2.73
4,729.0						964.8	0.51	0.45	0.91
4,773.0	14.20	219.40	4,654.3	-736.4	-623.4 -630.4	975.6	0.92	-0.23	3.64
4,817.0	14.10 14.00	221.00 221.20	4,697.0 4,740.6	-744.7 -752.9	-637.5	986.5	0.25	-0.22	0.44
4,862.0			•						
4,906.0	14.20	222.10	4,783.3	-760.9	-644.7	997.2 1,008.5	0.67 0.00	0.45 0.00	2.05 0.00
4,952.0	14.20	222.10	4,827.9	-769.3	-652.2				0.68
4,996.0	14.20	222.40	4,870.6	-777.3	-659.5	1,019.3	0.17	0.00	
5,040.0	14.30	225.20	4,913.2	-785.1	-667.0	1,030.1	1.58	0.23 0.00	6.36 4.00
5,085.0	14.30	227.00	4,956.8	-792.8	-675.0	1,041.2	0.99		
5,129.0	14.40	226.50	4,999.4	-800.3	-682.9	1,052.0	0.36	0.23	-1.14
5,173.0	14.00	225.60	5,042.1	-807.7	-690.7	1,062.8	1.04	-0.91	-2.05
5,219.0	13.90	223.40	5,086.7	-815.7	-698.5	1,073.8	1.17	-0.22	-4.78
5,263.0	13.50	222.00	5,129.5	-823.3	-705.5	1,084.3	1.18	-0.91	-3.18
5,308.0	13.90	222.70	5,173.2	-831.2	-712.7	1,094.9	0.96	0.89	1.56
	14.13	222.47	5,197.8	-835.7	-716.9	1,101.0	0.94	0.91	-0.92



Survey Report



Company:

NEWFIELD EXPLORATION

Project: Site: USGS Myton SW (UT)

Well: Wellbore: SECTION 9 T9S, R16E L-9-9-16

Design:

Wellbore #1 Actual Local Co-ordinate Reference:

TVD Reference:

MD Reference:

North Reference:

Survey Calculation Method:

Database:

Well L-9-9-16

L-9-9-16 @ 5734.0ft (NDSI SS #1)

L-9-9-16 @ 5734.0ft (NDSI SS #1)

True

Minimum Curvature

EDM 2003.21 Single User Db

Survey

Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
L-9-9-16 TGT	•								
5,352.0	14.30	222.30	5,215.9	-839.1	-720.0	1,105.6	0.94	0.91	-0.89
5,398.0	14.30	222.30	5,260.5	-847.5	-727.6	1,117.0	0.00	0.00	0.00
5,442.0	14.20	221.00	5,303.1	-855.6	-734.8	1,127.8	0.76	-0.23	-2.95
5,486.0	14.00	224.00	5,345.8	-863.5	-742.0	1,138.5	1.72	-0.45	6.82
5,532.0	13.70	225.60	5,390.4	-871.3	-749.8	1,149.5	1.06	-0.65	3.48
5,577.0	13.20	224.20	5,434.2	-878.7	-757.2	1,159.9	1.33	-1.11	-3.11
5,623.0	13.00	220.90	5,479.0	-886.4	-764.2	1,170.4	1.68	-0.43	-7.17
5,669.0	12.80	218.80	5,523.8	-894.3	-770.8	1,180.6	1.11	-0.43	-4.57
5,713.0	12.90	219.30	5,566.7	-901.9	<i>-</i> 777.0	1,190.4	0.34	0.23	1.14
5,757.0	13,30	219.20	5,609.6	-909.6	-783.3	1,200.4	0.91	0.91	-0.23
5,800.0	13,80	221.30	5,651.4	-917.3	-789.8	1,210.5	1.63	1.16	4.88
5,844.0	13.70	220.60	5,694.1	-925.2	-796.7	1,220.9	0.44	-0.23	-1.59
5,890.0	13.50	222.40	5,738.8	-933.3	-803.8	1,231.7	1.02	-0.43	3.91
5,936.0	13.30	222.00	5,783.6	-941.2	-811.0	1,242.4	0.48	-0.43	-0.87
5,979.0	13.40	221.50	5,825.4	-948.6	-817.6	1,252.3	0.36	0.23	-1.16
6,025.0	13.60	221,00	5,870.2	-956.7	-824.7	1,263.0	0.50	0.43	-1.09
6,069.0	13.60	222.90	5,912.9	-964.4	-831.6	1,273.4	1.02	0.00	4.32
6,115.0	13.20	222.30	5,957.7	-972.2	-838.8	1,284.0	0.92	-0.87	-1.30 0.00

Ole Lead Deep	Approved Dig	Date:	
Checked By:	Approved By:	Date:	
	 <del></del> ''		



Project: USGS Myton SW (UT) Site: SECTION 9 T9S, R16E


Well: L-9-9-16 Wellbore: Wellbore #1 Design: Actual




Azimuths to True North Magnetic North: 11.33°

Magnetic Field Strength: 52259.6snT Dip Angle: 65.79° Date: 6/25/2011



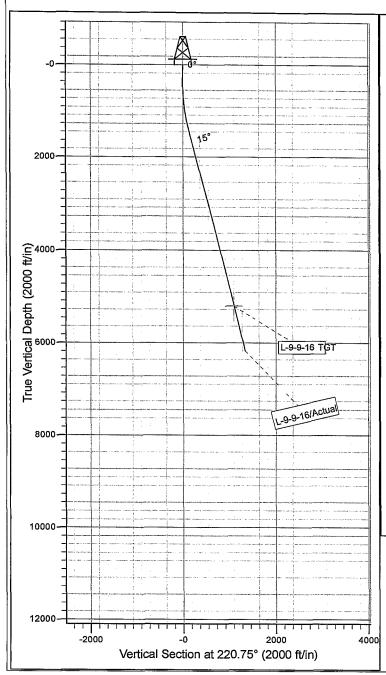

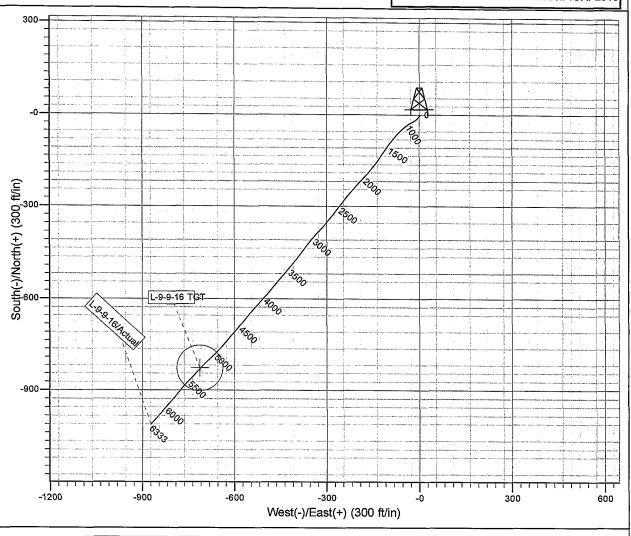



Design: Actual (L-9-9-16/Wellbore #1)

Created By: Sarah Webb

Date:

11:32, January 14 2013

THIS SURVEY IS CORRECT TO THE BEST OF MY KNOWLEDGE AND IS SUPPORTED BY ACTUAL FIELD DATA

## **Daily Activity Report**

# **Format For Sundry GMBU L-9-9-16** 8/1/2012 To 12/30/2012

10/22/2012 Day: 1

Completion

Rigless on 10/22/2012 - Run CBL & perforate stg #1 - RU WLT w/ Crane & run CBL. WLTD @ 6268' & cement top @ 556'. RU H/O truck & pressure test casing, blind rams, csg & casing valves to 4300 psi. Press test Top of Frac Valve & Lubricator to 5000 psi Perforate stage #1, CP5 sds @ (6066'-68') & CP5 sds @ (6056'-58') & CP1 sds @ (5752'-54') w/ 3 1/8" Disposible guns ( 16 gram .34" EH 22" pen w/120° phasing) w/ 3 spf for total of 18 shots. RD H/O truck, SS test unit & The Perforators WLT & crane. Wait on frac crew

Daily Cost: \$0

**Cumulative Cost: \$24,935** 

## 10/24/2012 Day: 2

Completion

Rigless on 10/24/2012 - Frac & Flow Back Well - 5th stage RU BJ Safety Meeting JSA. Press test Lines to 5200 psi. Open Well @ 1580 psi, Break Down PB-10 & GB-4 formation (12 holes) @ 1900 psi @ 6 BPM W/ 2.4 bbls 7% KCL water, Pump 73 bbls 7% KCL Water To get rate, Pump 15 BBIs 7% KCL to get X link, Pump 53 bbls 7% KCL 1# to 4# 20/40 sand (ramped), 134 bbls 7% KCL 4# to  $6^{\#}$  20/40 sand (ramped), Flush W/ 102 bbls 7% KCL Water. ISIP 2077 psi, FG .94, Max Press 3518 psi, Avg Press 3263 psi, Max Rate 35.7 BPM, Avg Rate 31.8 BPM. 30,160# 20/40 White Sand in Formation. 349 Total BBIs Pumped. - 4th Stage RU Extreme WL & G-4 Tester press test Lube to 5000psi. Open Well @ 1756 psi, RIH w/ CFTP & 3-1/8 Csg Guns 3 SPF, Set CFTP @ 4920' & perforate the D-1 Formation @ 4862'-66', (12 holes) POOH, RD WL, CWI - 3rd stage RU BJ Safety Meeting JSA. Press test Lines to 5200 psi. Open Well @ 1586 psi, Break Down C-Sand & D-3 formation (15 holes) @ 2454 psi @ 5.3 BPM W/ 2.3 bbls 7% KCL water, 52 bbls 7% KCL Water To get rate, Pump 15 BBls 7% KCL to get X link, Pump 85 bbls 7% KCL 1# to 4# 20/40 sand (ramped), 193 bbls 7% KCL 4# to 6# 20/40 sand (ramped), Pump 45 bbls 7% KCL 6# 20/40 sand (hold), 12 bbls 15% HCL, Flush W/ 106 bbls 7% KCL Water. ISIP 2062 psi, FG .87, Max Press 3963 psi, Avg Press 3632 psi, Max Rate 35.2 BPM, Avg Rate 28.4 BPM. 50,077# 20/40 White Sand in Formation. 472 Total BBIs Pumped. - 3rd Stage RU Extreme WL & G-4 Tester press test Lube to 5000psi. Open Well @ 1670 psi, RIH w/ CFTP & 3-1/8 Csg Guns 3 SPF, Set CFTP @ 5080' & perforate the C-Sand & D-3 Formation @ 5019'-22', 4977'-78', 4970'-71', (15 holes) POOH, RD WL, CWI - 2nd stage RU BJ Safety Meeting JSA. Press test Lines to 5200 psi. Open Well @ 1349 psi, Break Down A-3 & B-1 formation (15 holes) @ 1660 psi @ 4.9 BPM W/ .7 bbls 7% KCL water, Pump 47 bbls 7% KCL Water To get rate, Pump 15 BBIs 7% KCL to get X link, Pump 140 bbIs 7% KCL 1# to 4# 20/40 sand (ramped), 147 bbls 7% KCL 4# to 6# 20/40 sand (ramped). 12 bbls 15% HCL, Flush W/ 110 bbls 7% KCL Water. ISIP 1985 psi, FG .83, Max Press 3767 psi, Avg Press 3162 psi, Max Rate 33.4 BPM, Avg Rate 31.8 BPM. 35,419# 20/40 White Sand in Formation. 398 Total BBIs Pumped. - 2nd Stage RU Extreme WL & G-4 Tester press test Lube to 5000psi. Open Well @ 1497 psi, RIH w/ CFTP & 3-1/8 Csg Guns 3 SPF, Set CFTP @ 5450' & perforate the A-3 & B-1 Formation @ 5367'-71', 5147'-48', (15 holes) POOH, RD WL, CWI - 1st stage RU BJ Safety Meeting JSA. Press test Lines to 5200 psi. Open Well @ 208 psi, Break Down CP5 & CP-1 formation (18 holes) @ 2245 psi @ 4.6 BPM W/ 5 bbls 7% KCL water. Pump 6 bbls 15% HCL, 84 bbls 7% KCL Water To get rate & Acid on Perfs, Pump 15 BBls 7% KCL to get X link, Pump 85 bbls 7% KCL 1# to 4# 20/40 sand (ramped), 193 bbls 7% KCL 4# to 6# 20/40 sand (ramped), Pump 54 bbls 7% KCL 6# 20/40 sand (hold), 12 bbls 15% HCL, Flush W/ 125 bbls 7% KCL Water. ISIP 1892 psi, FG .78, Max Press 3690 psi, Avg Press 3324 psi, Max Rate 44.7 BPM, Avg Rate 37.5 BPM. 50,838# 20/40 White Sand in Formation. 524 Total BBIs Pumped. - 5th Stage RU Extreme WL & G-4 Tester press test Lube to 5000psi. Open Well @

1845 psi, RIH w/ CFTP & 3-1/8 Csg Guns 3 SPF, Set CFTP @ 4650' & perforate the PB-10 & GB-4 Formation @ 4565'-67', 4308'-10', (12 holes) POOH, RD WL, CWI - 4th stage RU BJ Safety Meeting JSA. Press test Lines to 5200 psi. Open Well @ 1720 psi, Break Down D-1 formation (12 holes) @ 2849 psi @ 4 BPM W/ .9 bbls 7% KCL water, Pump 45 bbls 7% KCL Water To get rate, Pump 15 BBls 7% KCL to get X link, Pump 106 bbls 7% KCL 1# to 4# 20/40 sand (ramped), 239 bbls 7% KCL 4# to 6# 20/40 sand (ramped), Pump 45 bbls 7% KCL 6# 20/40 sand (hold), 12 bbls 15% HCL, Flush W/ 104 bbls 7% KCL Water. ISIP 3271 psi, FG 1.13, Max Press 4010 psi, Avg Press 3403 psi, Max Rate 31.1 BPM, Avg Rate 28.7 BPM. 59,471# 20/40 White Sand in Formation. 510 Total BBls Pumped. Flushed end of stg away @ 7 bpm - RD baker frac equip, Open well w/ 1521 psi, Flow back well on 20 choke @ approx. 3 bpm, Recover 789 bbls fluid, Turned to oil, SWI (END WATER 1464 BBLS)

Daily Cost: \$0

Cumulative Cost: \$199,480

### 11/1/2012 Day: 3

Completion

Rigless on 11/1/2012 - Set kill plug @ 4250', NU & Test BOPE, Test Failed - RD MOVE OVER FROM 0-10-9-16 SPOT IN EQUIP. ND FRAC VALVE NU BOP. MIRU 4 STAR, BLEED OFF CSG. PU HANGER & 2 7/8 PUP JT. RIH LAND IN WELL HEAD. TEST LOW PSI 250 & HIGH 4500, NO TEST. POOH W/ HANGER TIGHTEN JT IN HANGER & CHANGE RUBBER SEAL ON HANGER. ATTEMPT TEST AGAIN. HELD FOR 6 MIN. LEAKING AGAIN. CYCLE RAMS AND RETEST. STILL LEAKING CALL FOR NEW PIPE RAMS FOR AM. - CICP 900 psi, RU Extreme W/L, RIH w/ Baker 20 setting tool & WFT 6k kill plug, Set kill plug @ 4250', POOH & RD W/L, Bleed off well, Well dead. - CREW TRAVEL

Daily Cost: \$0

Cumulative Cost: \$205,131

### 11/2/2012 Day: 4

Completion

Rigless on 11/2/2012 - Test BOPE, Tally & PU 4 3/4" mill & POBS, Drill out kill plug & 1 CFT plug. - DRILL CFP #2 @ 4650 IN 30 MIN, CIRC WELL CLEAN, EOT @ 4655¿ W/ 149 JTS. DRAIN EQUIP, CLEAN LOC. & TOOLS, SWI, SDFN - CREW TRAVEL - EST CIRC, C/O 10¿ SAND & DRILL CBP #1 @ 4250¿ IN 32 MIN, 100 PSI INCREASE, RIH TAG @ 4385¿ EST. CIRC. C/O 265½ SAND - PU NEW 4 ¾ MILL, POBS, 2 JTS TBG, SEAT NIPPLE, TALLY & DRIFTED 2 7/8 TBG RIH TAG @ 4240½ W/ 136 JTS. RU POWER SWIVEL - CHANGE OUT PIPE RAMS, RIG UP RIG, FLOOR & TBG EQUIP. INSTALL 2 WAY VALVE IN HANGER - MIRU 4 STAR, SET HANGER IN WELLHEAD, PRESSURE TEST BOP & VALVES, LOW 250 PSI & HIGH 4500 PSI, RD 4 STAR, GOOD TEST - CREW TRAVEL & SAFETY MEETING

Daily Cost: \$0

Cumulative Cost: \$215,138

### 11/5/2012 Day: 5

Completion

MWS #731 on 11/5/2012 - Drill out plugs, C/O to PBTD, Flow well over weekend - CREW TRAVEL - FLOW WELL BACK UNTIL SAND CLEANS UP, TURN WELL TO PRODUCTION, FLOW WELL, SDFW - RU SWIVEL EST. CIRC. C/O 509¿ SAND TO PBTD @ 6279½ CIRC. WELL CLEAN. RD SWIVEL POOH LD 5 JTS. EOT 6158 - DRILL CFP #3 @ 4920 IN 26 MIN. 20 PSI. INCREASE. RIH TAG @ 5080½ EST. CIRC, DRILL CFP #4 @ 5080½ IN 31 MIN. 0 PSI. RIH TAG @ 5450½ EST. CIRC, DRILL CFP #5 @ 5450½ IN 48 MIN. 0 PSI. RD SWIVEL RIH TAG @ 5770½, - SITP 150 PSI, SICP 825 PSI, RU FLOW LINES BLEED DOWN WELL & CONTROL TBG W/ 15 BBLS. RIH TAG @ 4885½ EST. CIRC. C/O 35½ SAND - Crew Travel & Safety Meeting

Daily Cost: \$0

Cumulative Cost: \$222,093

### 11/6/2012 Day: 6

Completion

MWS #731 on 11/6/2012 - Kill well, TOOH w/ tbg & BHA, TIH w/ prod. Tbg, Set TAC & land tbg, PU Pump & rods - CREW TRAVEL & SAFETY MEETING - NU WELLHEAD AND FLOW LINE, CHANGE OVER EQUIP TO PU RODS. - PU 2.5X1.75X24¿ ROD PUMP, 30 - 7/8½ (8) PER RODS, 70 - 3/4½ (4) PER RODS, SWI, CLEAN UP LOC. & TOOLS TURN TO SALES ON 10 CHOKE - CREW TRAVEL - FCP ON 24 CHOKE 300 PSI, SITP 300 PSI BLEED OFF WELL, PU & RIH W/ TBG TAG @ 6279½ PBTD, POOH LD 5 JTS ON TBG RACK, CONT. POOH W/ TBG TO 4264½, CIRC GAS & OIL OUT OF WELL, TO CONTROL CSG. CONT POOH W/ TBG IN DERRICK, LD MILL & POBS. - PU NOTCH COLLAR, 2 JTS 2 7/8 TBG, SEAT NIPPLE, 1 JT 2 7/8 TBG, & 5 ½ X 2 7/8 TAC, RIH 2 7/8 TBG, CONTROLED TBG W/ 20 BBLS, SOFT SET TAC, RELEASE 2 ROUNDS - CIRC GAS & OIL OUT OF WELL TO CONTROL CSG. LAND TBG EOT 6136.54½, RD TBG EQUIP & FLOOR, ND BOPS. UNLAND TBG LD HANGER. SET TAC W/ 17K TENSION @ 6040½, LAND TBG ON HANGER.

Daily Cost: \$0

**Cumulative Cost:** \$229,140

### 11/7/2012 Day: 7

Completion

MWS #731 on 11/7/2012 - Continue PU Rods, Space out & seat pump, PWOP,( END WATER 1064), FINAL REPORT !! - CSG PSI 300 W/ 10 CHOKE. SITP 125, BLEED DOWN WELL, CONTROL TBG W/ 10 BBLS, RIH W/ PUMP & RODS AS FOLLOWS: (PUMP #2058 25-175-RHAC-20-4-21-24), 30- 7/8¿ 8-PER, 140-3/4¿ 4-PER, 71- 7/8½ 4-PER, 3- PONIES 7/8¿X 8¿,6¿,2¿, 1 1/2" X 30' POLISH ROD, SPACE OUT & SEAT PUMP - CREW TRAVEL - FILL & TEST TBG TO 300 PSI, LONG STROKE PUMP W/ RIG TO 800 PSI. RU PUMP UNIT & HANGE RODS. RACK OUT EQUIP & RIG DOWN, 5 SPM W/ 144" STROKE - CLEAN UP LOCATION & TOOLS, TURN WELL OVER TO PRODUCTION - CREW TRAVEL & SAFETY MEETING **Finalized** 

Daily Cost: \$0

**Cumulative Cost:** \$319,578

**Pertinent Files: Go to File List**